


# DFI®

## SB102-D

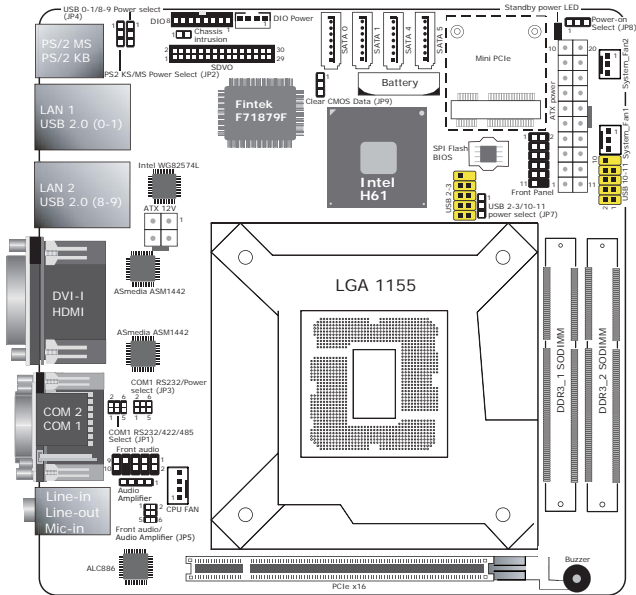

COM 1 RS232/RS422/RS485 Select	JP1
RS232 (default)	1-2 On
RS422 Full Duplex	3-4 On
RS485	5-6 On

Clear CMOS Data	JP9
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

USB Power Select: 0-1/8-9 (JP4), 2-3/10-11 (JP7)	
+5V (default)	1-2 On
+5V_standby	2-3 On

COM 1 RS232/Power Select	JP3
RS232 (default)	1-3 (RI), 2-4 (DCD) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On

PS/2 KB/MS Power Select	JP2
+5V (default)	1-2 On
+5V_standby	2-3 On

Power-on Select	JP8
Power-on via power button (default)	1-2 On
Power-on via AC Power Power-on via WOL After G3	2-3 On

Front Audio/Audio Amplify select	JP5
Front Audio (default)	1-3 On, 2-4 On
Audio Amplify	3-5 On, 4-6 On



## Battery Notice

### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

### Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.