


Board Layout

Top View

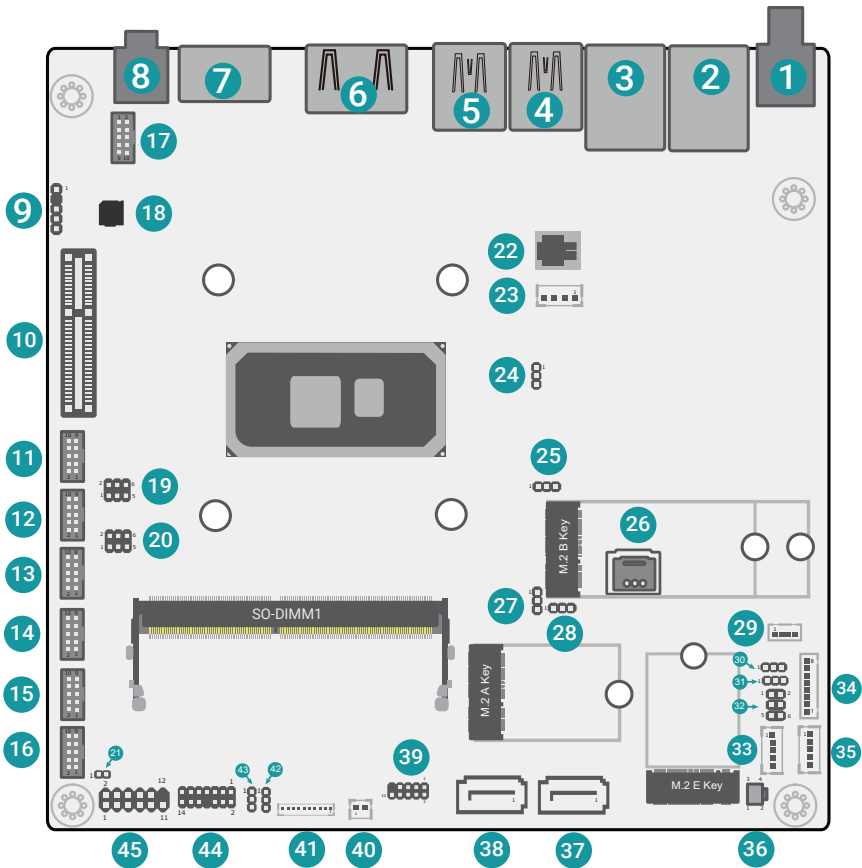

1	DC-in	21	Case Open
2	2.5G LAN 1	22	SPI
3	2.5G LAN 2	23	System Fan
4	USB3.2 Gen2	24	UART Header (Debug)
5	USB3.2 Gen2	25	SATA1 CONN/ M.2 B-KEY
6	DP++	26	SIM Card Slot
7	HDMI	27	USB3-A/ M.2 B-KEY
8	Line-out	28	PCIe Slotx2/ M.2 E-KEY
9	S/PDIF	29	System Fan
10	PCIe1	30	Panel Backlight ON Level Select
11	COM1	31	Panel Inverter Power Select
12	COM2	32	VCC Panel Power Select
13	COM3	33	SATA Power
14	COM4	34	Backlight CON
15	COM5	35	SATA Power
16	COM6	36	Clear CMOS Data
17	Front Audio	37	SATA1
18	Buzzer	38	SATA0
19	COM1 Power Select	39	USB2.0 Pin Header
20	COM2 Power Select	40	RTC Battery

41 DIO

42 DIO_4~7 Power Select

43 DIO_0~3 Power Select

44 eSPI Header(Debug)

45 Front Panel



Jumper Settings

36 Clear CMOS Data	SW1
Normal (Default)	1-2 Open
Clear CMOS Data	1-2 Short

31 Inverter Panel Power Select	DPJP4
12V (Default)	1-2 Short
5V	2-3 Short

25 SATA1 CONN/M.2 B-KEY	PBJP1
M.2 B-KEY, SATA (Default)	1-2 Short
SATA1 CONN	2-3 Short

43 DIO_0~3 Power Select	JP2
Normal (Default)	1-2 Short to 5VSB
GND	2-3 Short to GND

28 PCIE Slotx2/M.2 E-KEY	PBJP2
M.2 E-KEY, PCIe1 (Default)	1-2 Short
PCIEx2 Slotx2 (Optional)	2-3 Short

42 DIO_4~7 Power Select	JP5
Normal (Default)	1-2 Short to 5VSB
GND	2-3 Short to GND

27 USB3-A/M.2 B-KEY	PBJP3
M.2 B-KEY, USB3 (Default)	1-2 Short
USB3-TYPE-A	2-3 Short

30 Panel Backlight ON Level Select	DPJP1
3V3 (Default)	1-2 Short
5V	2-3 Short

32 VCC Panel Power Select	DPJP3
12V	1-2 Short
5V	3-4 Short
3V3 (Default)	5-6 Short

PIN Assignment

40 ▶ RTC Battery (J19)

Pin	Assignment
1	V_BAT
2	GND

21 ▶ Case Open (J2)

Pin	Assignment
1	CASEOPEN-
2	GND

24 ▶ UART Header (Debug) (JP4)

Pin	Assignment
1	DEBUG_UART_TX
2	DEBUG_UART_RX
3	GND

23 ▶ System Fan (J20)

Pin	Assignment
1	GND
2	+12V
3	PWM
4	TACH

29 ▶ System Fan (J10)

Pin	Assignment
1	GND
2	+12V
3	PWM
4	TACH

41 ▶ DIO (J16)

Pin	Assignment
1	D_IOA7
2	D_IOA6
3	D_IOA5
4	D_IOA4
5	D_IOA3
6	D_IOA2
7	D_IOA1
8	D_IOA0
9	5VSB
10	GND

33 ▶ SATA POWER (CN8)

Pin	Assignment
1	5V
2	5V
3	12V
4	GND
5	GND

35 ▶ SATA POWER (CN12)

Pin	Assignment
1	5V
2	5V
3	12V
4	GND
5	GND

9 ▶ S/PDIF (AUJ2)

Pin	Assignment
1	5V
2	NC
3	SPDIF OUT
4	GND
5	SPDIF IN

37 ▶ SATA1 (J12)

Pin	Assignment
1	GND
2	TXP
3	TXN
4	GND
5	RXN
6	RXP
7	GND

38 ▶ SATA0 (J4)

Pin	Assignment
1	GND
2	TXP
3	TXN
4	GND
5	RXN
6	RXP
7	GND

34 ▶ Backlight CON (DPJ2)

Pin	Assignment
1	GND
2	GND
3	PWM
4	VCC_PANEL_PWR
5	LVDS_3V3
6	BLONOFF
7	INV_PWR
8	INV_PWR

19 ► COM1 Power Select (TSJP1)

Pin	Assignment	Pin	Assignment
1	MRI-	2	MDCD-
3	X_MRI-	4	X_MDCD-
5	5V	6	12V

20 ► COM2 Power Select (TSJP2)

Pin	Assignment	Pin	Assignment
1	MRI-	2	MDCD-
3	X_MRI-	4	X_MDCD-
5	5V	6	12V

11 ► COM1 (TSJ1)

Pin	Assignment	Pin	Assignment
1	MDCD-	2	MSIN-
3	MSO-	4	MDTR-
5	GND	6	MDSR-
7	MRTS-	8	MCTS-
9	MRI-	10	----

12 ► COM2 (TSJ2)

Pin	Assignment	Pin	Assignment
1	MDCD-	2	MSIN-
3	MSO-	4	MDTR-
5	GND	6	MDSR-
7	MRTS-	8	MCTS-
9	MRI-	10	----

13 ► COM3 (TSJ3)

Pin	Assignment	Pin	Assignment
1	MDCD-	2	MSIN-
3	MSO-	4	MDTR-
5	GND	6	MDSR-
7	MRTS-	8	MCTS-
9	MRI-	10	----

14 ► COM4 (TSJ4)

Pin	Assignment	Pin	Assignment
1	MDCD-	2	MSIN-
3	MSO-	4	MDTR-
5	GND	6	MDSR-
7	MRTS-	8	MCTS-
9	MRI-	10	----

15 ▶ COM5 (TSJ5)

Pin	Assignment	Pin	Assignment
1	MDCD-	2	MSIN-
3	MSO-	4	MDTR-
5	GND	6	MDSR-
7	MRTS-	8	MCTS-
9	MRI-	10	----

16 ▶ COM6 (TSJ6)

Pin	Assignment	Pin	Assignment
1	MDCD-	2	MSIN-
3	MSO-	4	MDTR-
5	GND	6	MDSR-
7	MRTS-	8	MCTS-
9	MRI-	10	----

17 ▶ Front Audio (AUJ1)

Pin	Assignment	Pin	Assignment
1	MIC2_L	2	GND
3	MIC2_R	4	NC
5	LINE2_R	6	MIC2_JD
7	GND	8	NC
9	LINE2_L	10	LINE2_JD

39 ▶ USB2.0 Pin Header (J3)

Pin	Assignment	Pin	Assignment
1	5V	2	5V
3	USB2_4_C_N	4	USB2_3_C_N
5	USB2_4_C_P	6	USB2_3_C_P
7	GND	8	GND
9	----	10	NC

45 ► Front Panel (J17)

Pin	Assignment	Pin	Assignment
1	NC	2	3V3SB
3	3V3	4	3V3SB
5	HD_LED#	6	SUS_LED#
7	GND	8	GND
9	SYS_RST0	10	PWR_BTN0
11	NC	12	---

44 ► eSPI Header(Debug) (J5)

Pin	Assignment	Pin	Assignment
1	3V3SB	2	ESPI_CLK
3	ESPI_RESET#	4	GND
5	ESPI_ALT#	6	GND
7	ESPI_D0	8	---
9	ESPI_D1	10	ESPI_CS
11	ESPI_D2	12	3V3SB
13	ESPI_D3	14	3V3SB



DFI reserves the right to change the specifications at any time prior to the product's release. This QR may be based on the product's revision. For more documentation and drivers, please visit the download page at www.dfi.com/downloadcenter, or via the QR codes to the right.

