


**Board Layout and Jumper Settings**

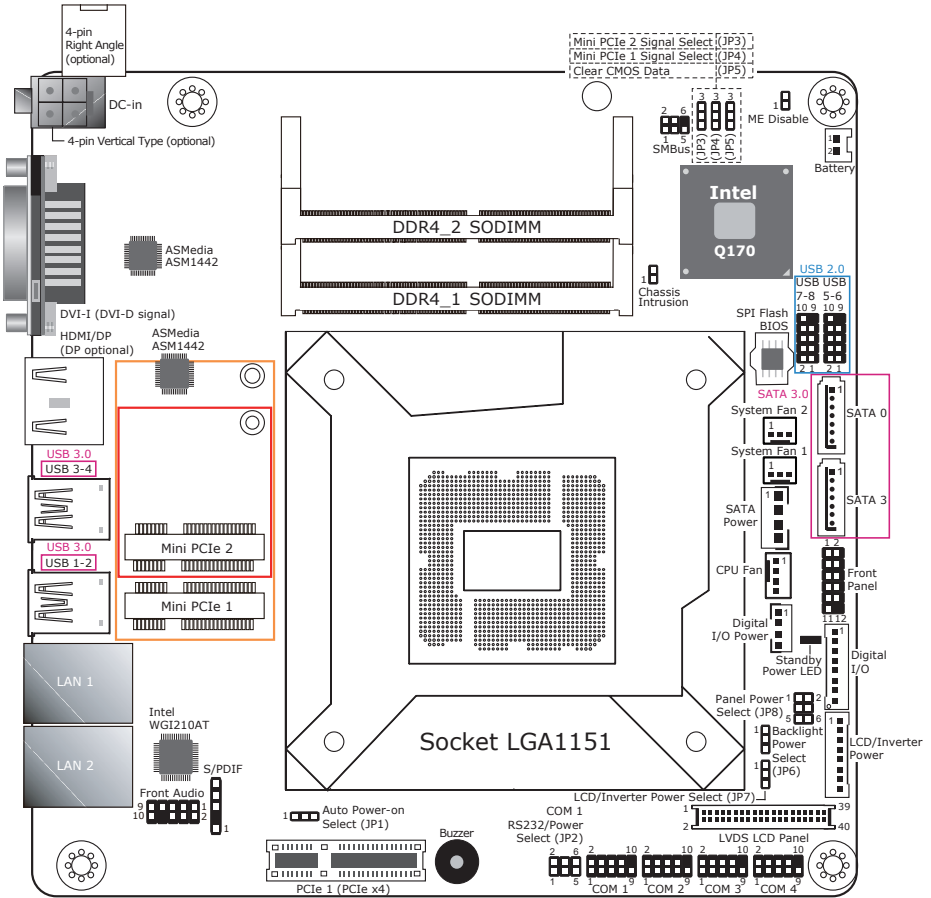

- Note:**
1. SD101-Q170: Single 12V +/-10% DC.
  2. SD103-Q170: Wide range 15~36V.

Clear CMOS Data	JP1
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

Backlight Power Select	JP6
+3.3V (default)	1-2 On
+5V	2-3 On

LCD/Inverter Power Select	JP7
+12V (default)	1-2 On
+5V	2-3 On

Mini PCIe 1 Signal Select	JP4
Mini PCIe	1-2 On
mSATA (default)	2-3 On

Mini PCIe 2 Signal Select	JP3
Mini PCIe	1-2 On
mSATA (default)	2-3 On

Panel Power Select	JP8
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

Power-on Select	JP1
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

COM 1 RS232 Power Select	JP2
Standard RS232 (default)	1-3 (RI), 2-4 (DCD) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On



DFI reserves the right to change the specifications at any time prior to the product's release. This QR may be based on editions that do not resemble your actual products. For more documentation and drivers, please visit the download page at [go.dfi.com/SD101\\_SD103-Q170](http://go.dfi.com/SD101_SD103-Q170), or via the QR code to the right.

