


DFI®

SU171/SU173

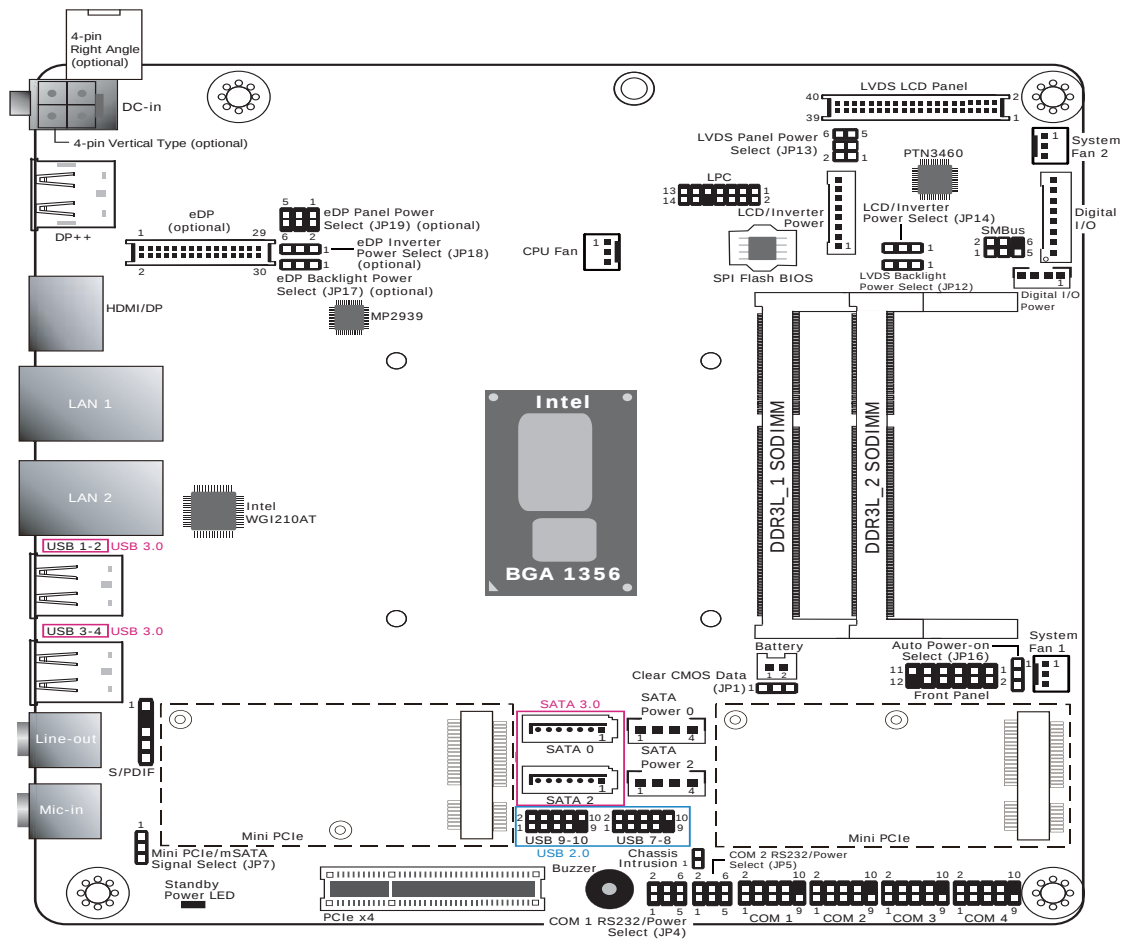

Clear CMOS Data	JP1
Normal (default)	1-2 On
Clear CMOS Data	2-3 On
LVDS Panel Power Select	JP13
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On
LCD/Inverter Power Select	JP14
+12V (default)	1-2 On
+5V	2-3 On
LVDS Backlight Power Select	JP12
+3.3V (default)	1-2 On
+5V	2-3 On
Mini PCIe/mSATA Signal Select	JP7
mSATA (default)	1-2 On
Mini PCIe	2-3 On
Auto Power-on Select	JP16
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

RS232/Power Select	COM 1 (JP4) COM 2 (JP5)
RS232 (default)	1-3 (RI-), 2-4 (DCD-) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On
eDP Panel Power Select (Optional)	JP19
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On
eDP Inverter Power Select (Optional)	JP18
+12V (default)	1-2 On
+5V	2-3 On
eDP Backlight Power Select (Optional)	JP17
+3.3V (default)	1-2 On
+5V	2-3 On

Note:

1. SU171: Single 12V +/-10% DC.
2. SU173: Wide Range 15~36V.
3. The eDP connector is optional. Please contact your sales representative for more information.
4. JP17, JP18 and JP19 will work when the eDP connector is populated on the system board.

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.