


DFI®

COM100-B

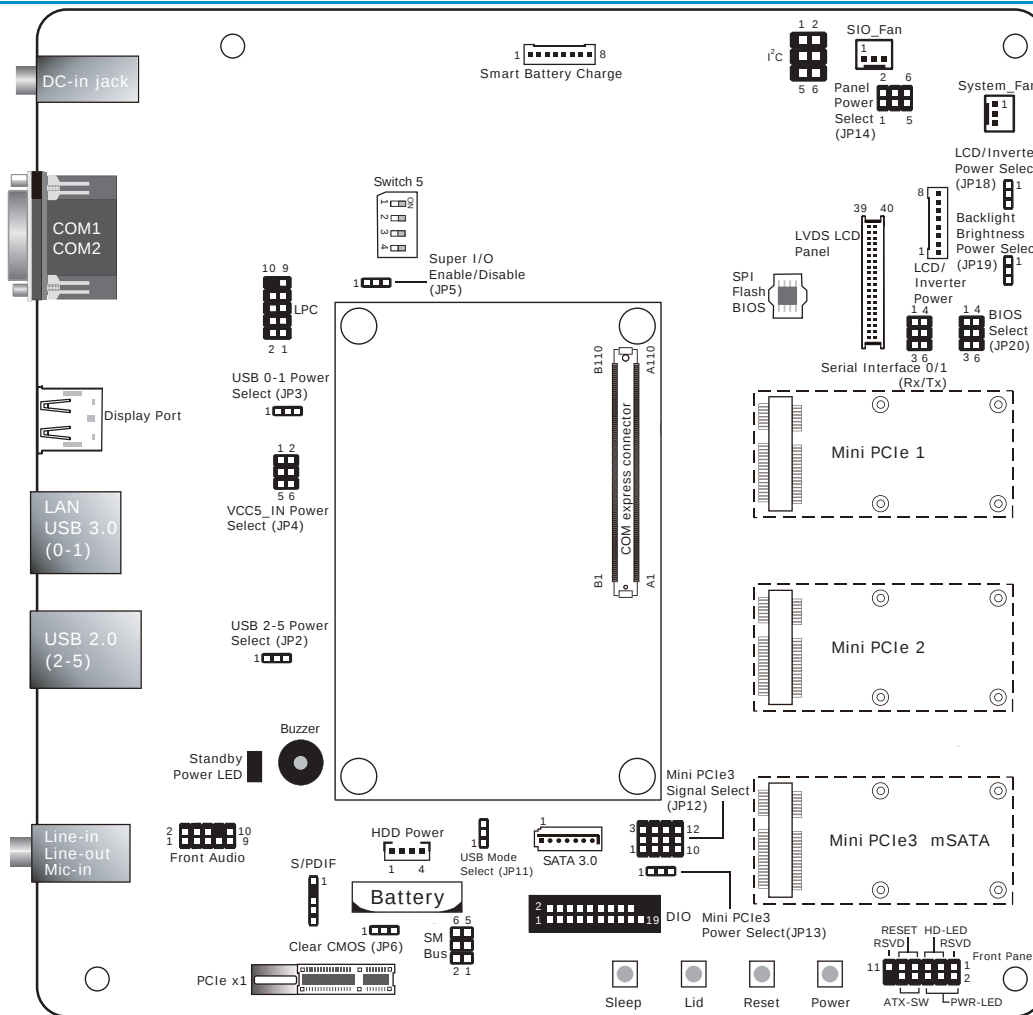

USB Power Select: 0-1 (JP3), 2-5 (JP2)					
+5V (default)			1-2 On		
+5V_standby			2-3 On		
Clear CMOS			JP6		
Normal (default)			1-2 On		
Clear CMOS			2-3 On		
USB Mode Select			JP11		
NC			1-2 On		
Host (default)			2-3 On		
Mini PCIe3 Power Select			JP13		
+3.3 V (default)			1-2 On		
+3.3 V_standby			2-3 On		
Panel Power Select			JP14		
+12V			1-2 On		
+5V			3-4 On		
+3.3V (default)			5-6 On		
JP4		1-2 On	3-4 On	5-6 On	
VCC5_IN Power Select		5VSB (default)	5V	NC	
Switch 5		1 On	2 On	3 On	4 On
DC-IN Voltage Level		19V	12V (default)	5V	NC

Super I/O Enable/Disable		JP5	
Enable	1-2	On	
Disable (default)	2-3	On	
LCD / Inverter Power Select		JP18	
+12V	1-2	On	
+5V (default)	2-3	On	
BIOS Select		JP20	
Module SPI	1-2 On	4-5 On	
NC	2-3 On	4-5 On	
Carrier SPI0	1-2 On	5-6 On	
Module SPI0 (default)	2-3 On	5-6 On	
Backlight Brightness Power Select		JP19	
+5V	1-2	On	
+3.3V (default)	2-3	On	
Mini PCIe3 Signal Select		JP12	
PCIe	1-4-7-10	2-5-8-11 On	
mSATA (default)	2-5-8-11	3-6-9-12 On	

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.