




Atom

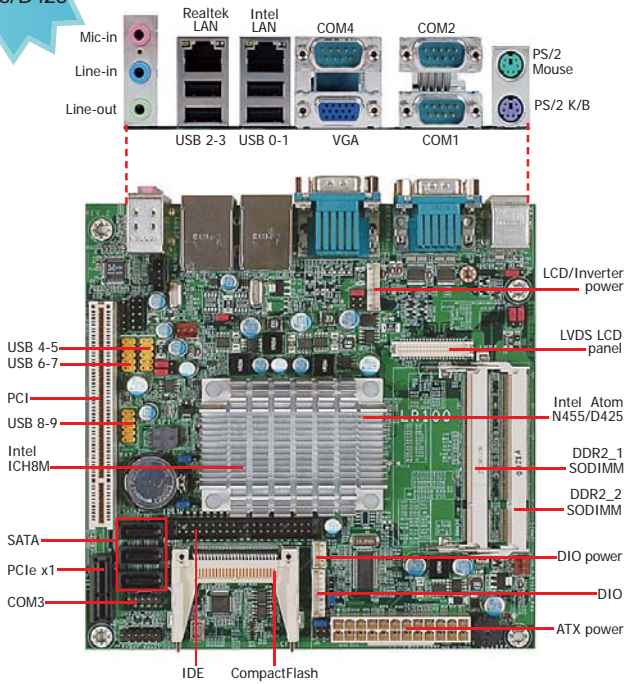


## Features


CHIPSET	Intel® ICH8M
CPU	Intel® Atom™ N455 (-N18M) Intel® Atom™ D425 (-N18S)
MEMORY	2 DDR2 SODIMM up to 2GB (-N18M) 2 DDR2 SODIMM up to 4GB (-N18S)
EXPANSION	1 PCIe x1, 1 PCI
DISPLAY OUTPUTS	1 VGA, 1 LVDS
LAN	2 Gigabit LAN ports
COM	4 COM
USB	10 USB 2.0
STORAGE	3 SATA 2.0 1 CF 1 IDE
DIO	8-bit DIO



## Mechanical Drawing

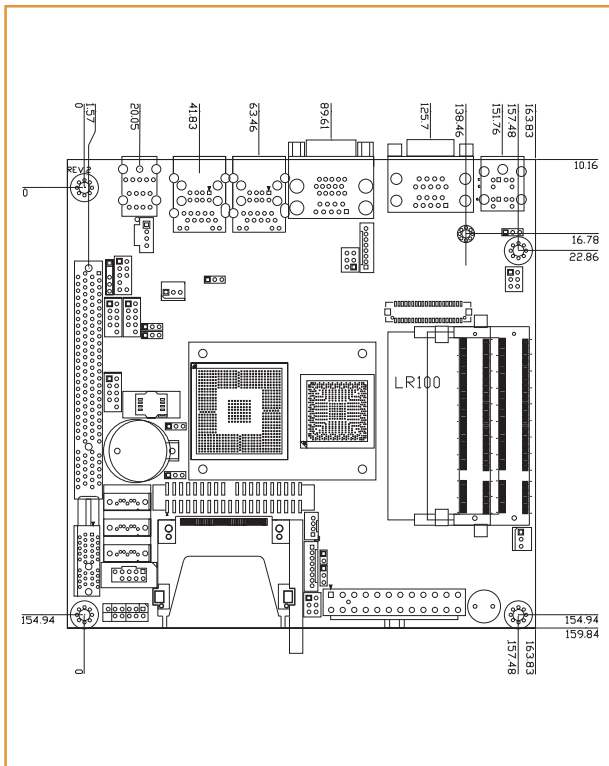

## Block Diagram

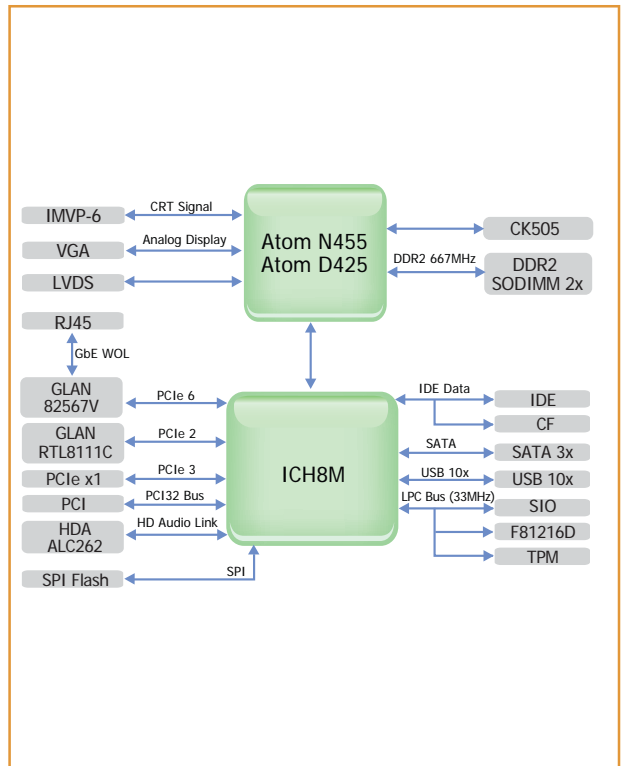

# LR100-N18M/N18S Mini-ITX **DFI**

## Specifications

### PROCESSOR

- Intel® Atom™ N455 (-N18M)
- Intel® Atom™ D425 (-N18S)
- On die 1 x 512KB, 8-way L2 cache
- C0/C1(E)/C2(E)/C4(E) C-states (-N18M)
- C0 and C1 C-states (-N18S)
- 1.66GHz core frequency, 1.10V voltage (-N18M)
- 1.8GHz core frequency, 1.10V voltage (-N18S)
- IA 32-bit and Intel® 64 architecture
- Micro-FCBGA8 packaging technologies
- Cooling option: heat sink (fanless solution)

### SOUTHBRIDGE

- Intel® ICH8M I/O Controller Hub

### SYSTEM MEMORY

- Two 200-pin SODIMM sockets
- Supports DDR2 667MHz only (-N18M)
- Supports DDR2 667/800MHz only (-N18S)
- Supports up to 2GB system memory (-N18M)
- Supports up to 4GB system memory (-N18S)
- Single channel memory interface
- Supports x16 devices

### EXPANSION SLOTS

- 1 PCIe x1 slot
- 1 PCI slot
- 1 CompactFlash socket

### ONBOARD GRAPHICS FEATURES

- Intel® GMA 3150
  - Contains a refresh of the 3rd generation graphics core
- 200MHz render clock frequency (-N18M)
- 400MHz render clock frequency (-N18S)
- Display ports: LVDS and VGA
  - LVDS: 18-bit single channel; resolution up to 1280x800 or 1366x768 (-N18M)
  - LVDS: 18-bit single channel; resolution up to 1366x768, 18bpp (-N18S)
  - VGA: resolution up to 1400x1050 @ 60Hz (-N18M)
  - VGA: resolution up to 2048x1536 @ 60Hz (-N18S)
- DirectX 9 compliant Pixel Shader 2.0

### ONBOARD AUDIO FEATURES

- Realtek ALC262 2-channel High Definition Audio
- High performance DACs with 100dB SNR
- ADCs with 90dB SNR
- Two stereo DACs support 24-bit PCM format for stereo audio playback
- Three stereo ADCs support 20-bit PCM format for multiple input streaming
- S/PDIF audio interface

### ONBOARD LAN FEATURES

- Intel® 82567V Gigabit Ethernet Phy and Realtek RTL8111C PCI Express Gigabit Ethernet controller
- Integrated 10/100/1000 transceiver
- Supports Full Duplex flow control (IEEE 802.3x)
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports power down / link down power saving

### SERIAL ATA INTERFACE

- 3 Serial ATA ports compliant with SATA 1.0 specification
- SATA speed up to 3Gb/s (SATA 2.0)

### TRUSTED PLATFORM MODULE (TPM) - optional

- Provides a Trusted PC for secure transactions
- Provides software license protection, enforcement and password protection

### REAR PANEL I/O PORTS

- 1 mini-DIN-6 PS/2 mouse port
- 1 mini-DIN-6 PS/2 keyboard port
- 3 DB-9 RS232 serial ports
  - Pins 1 and 9 of COM2 functions as RS232 signal or power (selectable via jumper)
- 1 DB-15 VGA port
- 2 RJ45 LAN ports
- 4 USB 2.0/1.1 ports
- Mic-in, line-in and line-out

### I/O CONNECTORS

- 3 connectors for 6 external USB 2.0/1.1 ports
- 1 connector for an external RS232/422/485 serial port
- 1 LVDS LCD panel connector
- 1 LCD/inverter power connector
- 1 8-bit DIO connector
- 1 DIO power connector
- 1 front audio connector for line-out and mic-in jacks
- 1 CD-in audio connector
- 1 S/PDIF connector
- 3 Serial ATA connectors
- 1 40-pin IDE connector
- 1 24-pin ATX power connector
- 1 front panel connector
- 1 chassis intrusion connector
- 2 fan connectors

### BIOS

- AMI BIOS
- SPI BIOS

### ENERGY EFFICIENT DESIGN

- ACPI v1.0a specification
- System Power Management
- Wake-On-Events include:
  - Wake-On-USB Keyboard/Mouse
  - Wake-On-LAN
  - Wake-On-Ring
  - RTC timer to power-on the system
- AC power failure recovery

### DAMAGE FREE INTELLIGENCE

- Monitors CPU/system temperature and overheat alarm
- Monitors 5V/1.05V/1.8V/12V/3VSB/VBAT/VCORE voltages and failure alarm
- Monitors system fan speed and failure alarm
- Read back capability that displays temperature, voltage and fan speed
- Watchdog timer function

### POWER CONSUMPTION

- 13.19 W with D425 at 1.80GHz and 1x 1GB DDR2 SODIMM

### TEMPERATURE

- 0°C to 60°C

### HUMIDITY

- 10% to 90%

### DIMENSIONS

- Mini-ITX form factor
- 170mm (6.7") x 170mm (6.7")

### CERTIFICATION

- CE
- FCC Class B
- UL
- RoHS

## Packing List

- 1 System board
- 1 IDE cable
- 1 USB cable
- 1 Serial ATA cable
- 1 Serial ATA power cable
- 1 Bracket mounted with a COM port
- 1 I/O shield
- 1 CD
- 1 QR (Quick Reference)

## Optional Items

- USB port cable
- COM port cable
- Serial ATA data cable
- Serial ATA power cable
- IDE cable
- I/O shield
- heat sink: A71-010012-000G

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. Refer to the website ([www.dfi.com](http://www.dfi.com)) for the most updated information. All product names mentioned are trademarks of their respective companies. © July 24, 2013 DFI Inc.