


DFI®

HD330-H81

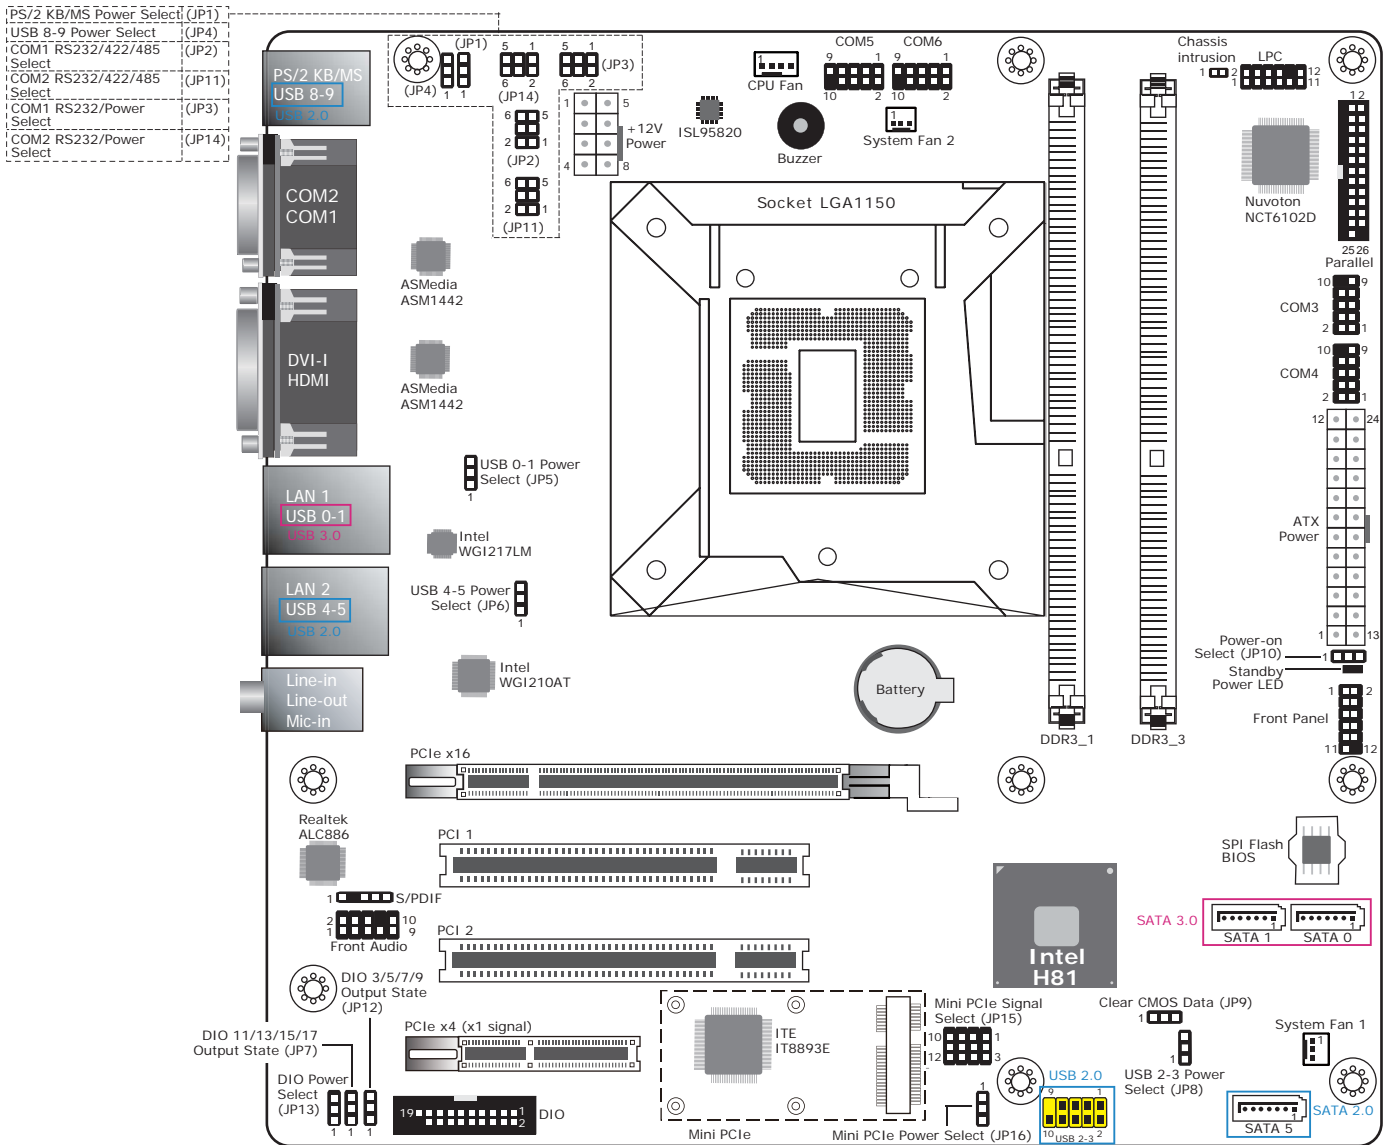

PS/2 Keyboard/Mouse Power Select	JP1	Digital I/O Power Select	JP13
+5V (default)	1-2 On	+5V_standby (default)	1-2 On
+5V_standby	2-3 On	+5V	2-3 On
RS232/RS422/RS485 Select: COM 1 (JP2), COM 2 (JP11)		Digital I/O Output State: DIO 3/5/7/9 (JP12), DIO 11/13/15/17 (JP7)	
RS232 (default)	1-2 On	+5V or +5V_standby (default)	1-2 On
RS422 Full Duplex	3-4 On	GND	2-3 On
RS485	5-6 On	Mini PCIe Power Select	
RS232/Power Select: COM 1 (JP3), COM 2 (JP14)		+3.3V (default)	1-2 On
RS232 (default)	1-3 (RI), 2-4 (DCD) On	+3V_standby	2-3 On
RS232 with power	3-5 (+5V), 4-6 (+12V) On	Mini PCIe Signal Select	
USB Power Select: 0-1 (JP5), 2-3 (JP8), 4-5 (JP6), 8-9 (JP4)		PCIe (default)	1-4-7-10 2-5-8-11 On
+5V (default)	1-2 On	mSATA	2-5-8-11 3-6-9-12 On
+5V_standby	2-3 On	Power-on Select	
Clear CMOS Data		JP10	
Normal (default)	1-2 On	Power-on via Power Button (default)	1-2 On
Clear CMOS Data	2-3 On	Power-on via AC Power	2-3 On

Note:

1. HD330-H81B supports LAN1 only.
2. HD330-H81C: 6 COM (COM1 to COM6).
HD330-H81B/D: 2 COM (COM1 and COM2).

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.