


# DFI®

## CP100-NRM

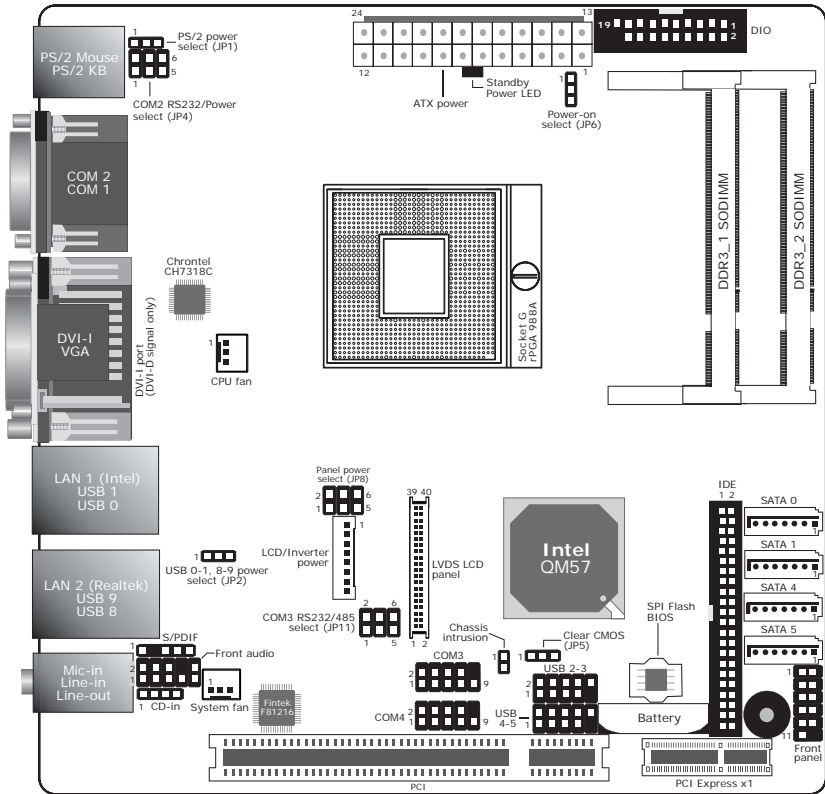

COM 2 RS232/Power	JP4
RS232 (default)	1-3, 2-4 On
RS232 with power	3-5 (5V), 4-6 (12V) On

Clear CMOS Data	JP5
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

COM 3 RS232/ RS485 Select	JP11
RS232 (default)	1-2 On
RS485	5-6 On

PS/2 Power	JP1
5V (default)	1-2 On
5V_standby	2-3 On

Panel Power Select	JP8
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

USB 0-1, 8-9 Power	JP2
5V (default)	1-2 On
5V_standby	2-3 On

Power-on Select	JP6
Power-on via power button (default)	1-2 On
Power-on via AC power;	2-3 On
Power-on via WOL After G3	



## Battery Notice

### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

### Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.