


## BT551/BT553

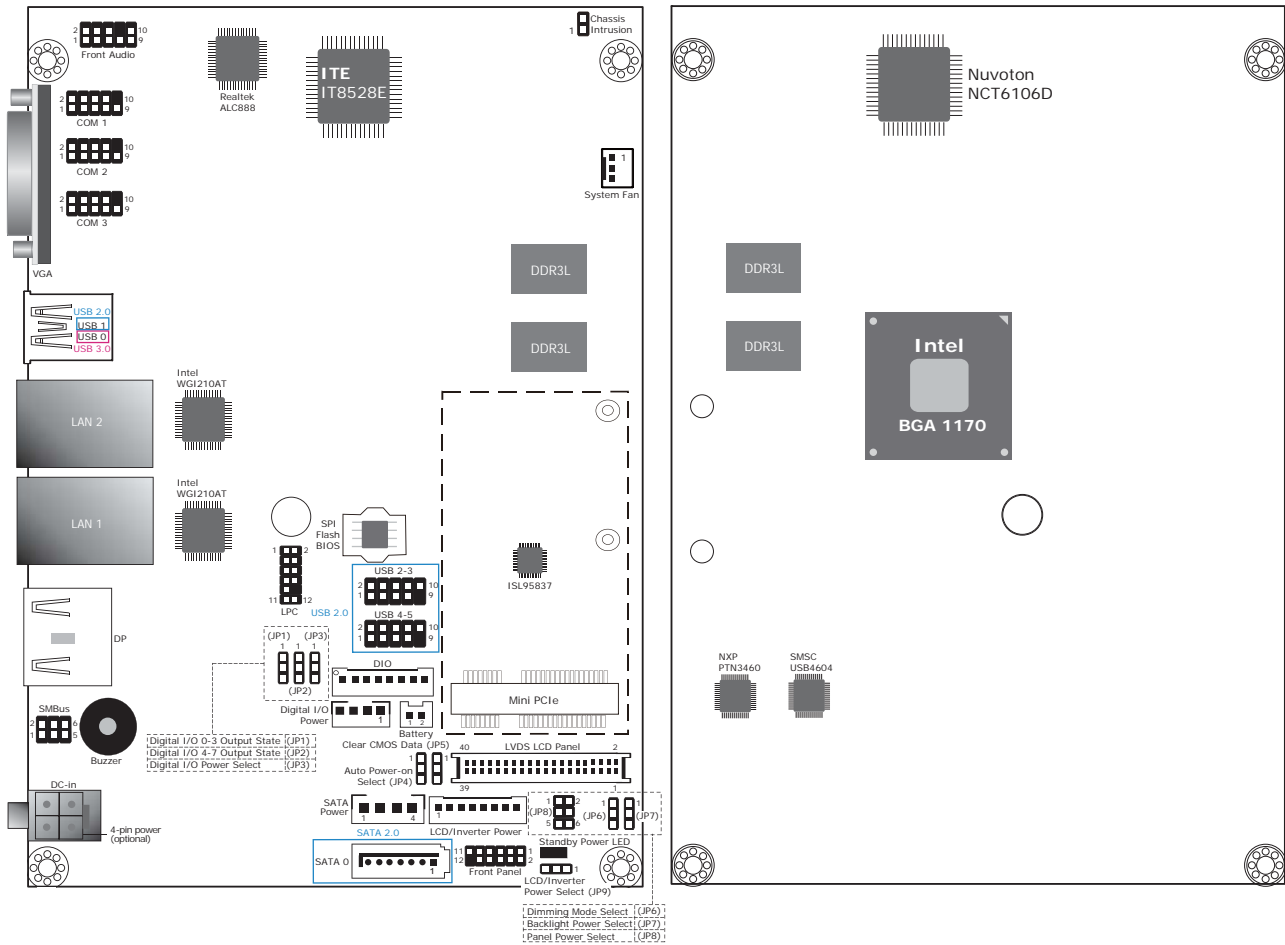

TOP

BOTTOM

<b>Dimming Mode Select</b>	<b>JP6</b>
PWM Mode (default)	1-2 On
Voltage Mode	2-3 On
<b>Backlight Power Select</b>	<b>JP7</b>
+3.3V (default)	1-2 On
+5V	2-3 On
<b>Panel Power Select</b>	<b>JP8</b>
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On
<b>LCD/Inverter Power Select</b>	<b>JP9</b>
+12V (default)	1-2 On
+5V	2-3 On
<b>Auto Power-on Select</b>	<b>JP4</b>
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

<b>Clear CMOS Data</b>	<b>JP5</b>
Normal (default)	1-2 On
Clear CMOS Data	2-3 On
<b>Digital I/O Power Select</b>	<b>JP3</b>
+5V_standby (default)	1-2 On
+5V	2-3 On
<b>Digital I/O Output State</b>	<b>JP1 (DIO 0-3) JP2 (DIO 4-7)</b>
+5V or +5V_standby (default)	1-2 On
GND	2-3 On

**Note:**

1. BT551: 12V DC-in jack (default) or 4-pin power connector (optional).
2. BT553: 15~36V DC-in jack (default) or 4-pin power connector (optional).

## Battery Notice

---



### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



### Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.