


# DFI®

## CR101-D

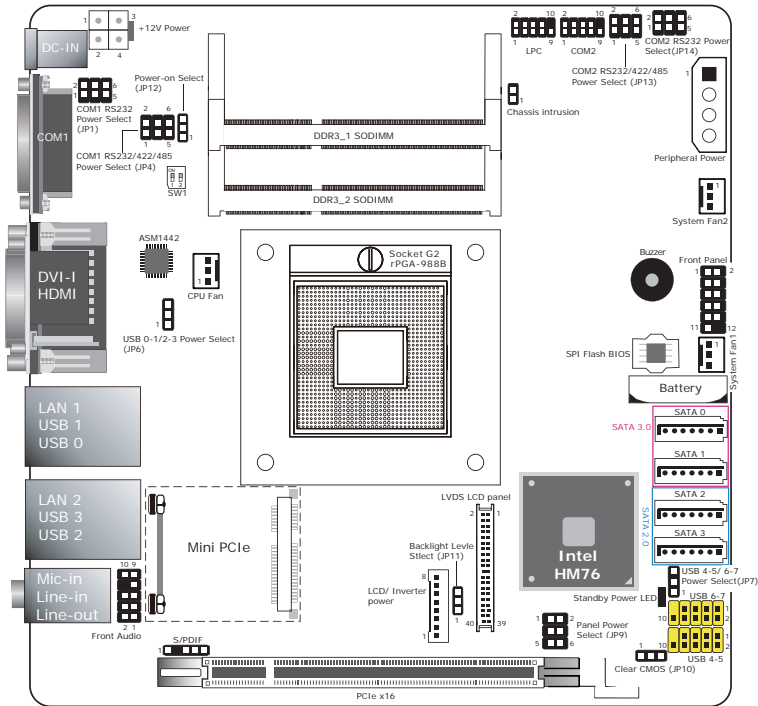

COM 1 (JP4), COM 2 (JP13) RS232/RS422/RS485 Select	
RS232 (default)	1-2 On
RS422 Full Duplex	3-4 On
RS485	5-6 On

Power-on Select JP12	
Power-on via power button (default)	1-2 On
Power-on via AC power;	2-3 On
Power-on via WOL After G3	

Backlight Level Select JP11	
+5V (default)	1-2 On
+3.3V	2-3 On

PCIe x16 Supported Configurations SW1	
One PCIe x8, Two PCIe x4	1-2 On
Two PCIe x8	1 On, 2 Off
One PCIe x16 (default)	1-2 Off

Panel Power Select JP9	
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

USB Power: 0-3 (JP6)/ 4-7 (JP7)	
+5V (default)	1-2 On
+5V_standby	2-3 On

Clear CMOS JP10	
Normal (default)	1-2 On
Clear CMOS	2-3 On

COM 1 (JP1), COM 2 (JP14) RS232/Power	
RS232 (default)	1-3, 2-4 On
RS232 with power	3-5 (+12V), 4-6 (+5V) On



## Battery Notice

### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

### Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.