


DFI®

HD330-Q87

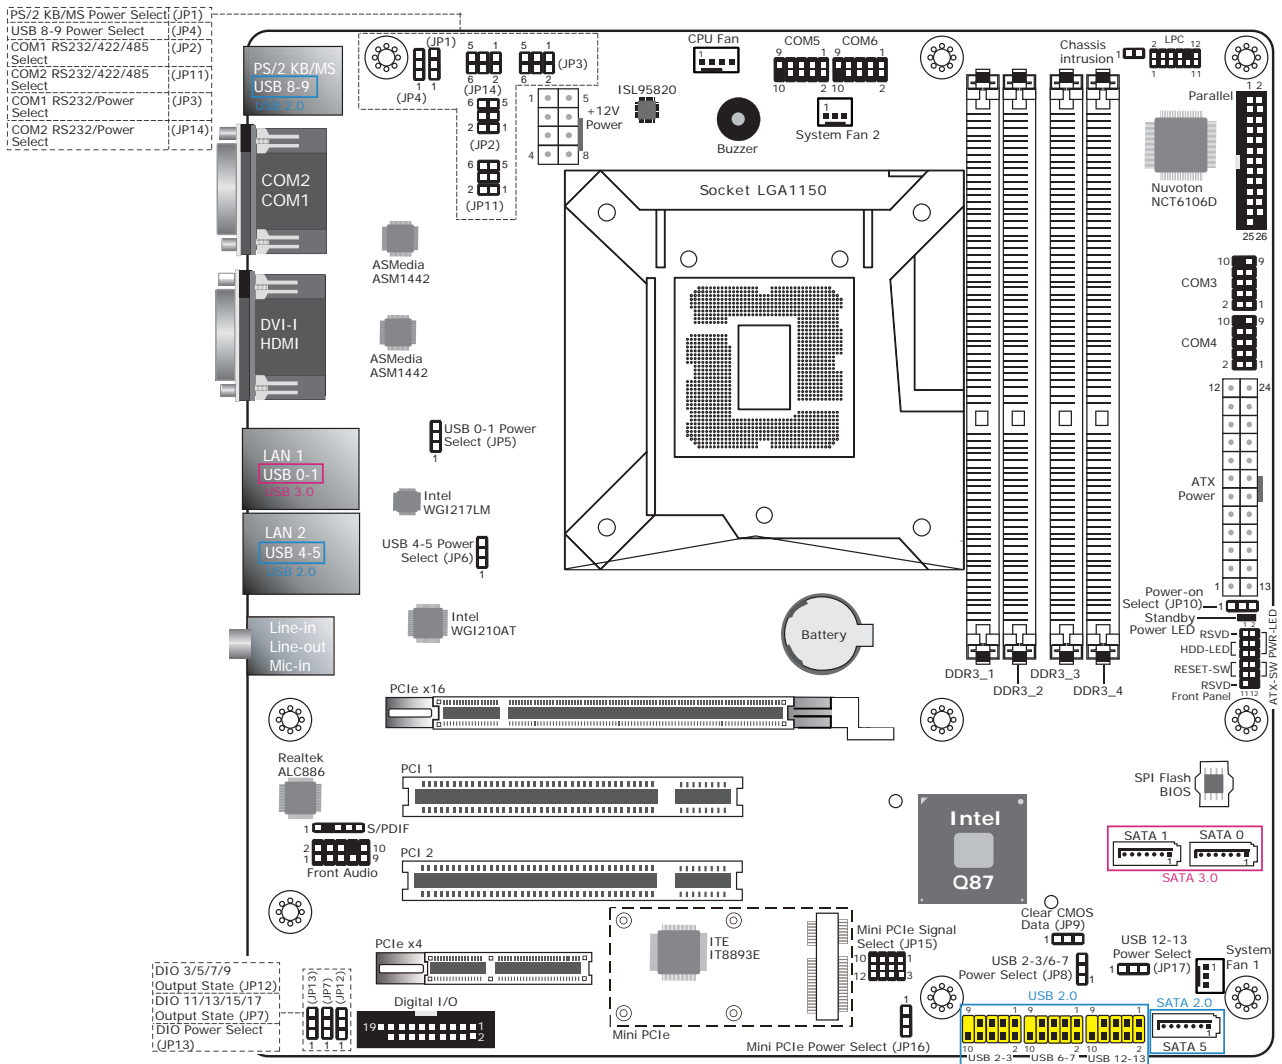

| | |
|---|--------------------------|
| PS/2 Keyboard/Mouse Power Select | JP1 |
| +5V (default) | 1-2 On |
| +5V_standby | 2-3 On |
| RS232/RS422/RS485 Select: COM 1 (JP2), COM 2 (JP11) | |
| RS232 (default) | 1-2 On |
| RS422 Full Duplex | 3-4 On |
| RS485 | 5-6 On |
| RS232/Power Select: COM 1 (JP3), COM 2 (JP14) | |
| RS232 (default) | 1-3 (RI), 2-4 (DCD) On |
| RS232 with power | 3-5 (+5V), 4-6 (+12V) On |
| USB Power Select: 8-9 (JP4), 0-1 (JP5), 2-3/6-7 (JP8), 4-5 (JP6), 12-13 (JP17) | |
| +5V (default) | 1-2 On |
| +5V_standby | 2-3 On |
| Mini PCIe Signal Select | |
| PCIe (default) | 1-4-7-10 2-5-8-11 On |
| mSATA | 2-5-8-11 3-6-9-12 On |

| | |
|--|------------|
| Clear CMOS Data | JP9 |
| Normal (default) | 1-2 On |
| Clear CMOS Data | 2-3 On |
| Digital I/O Power Select | |
| +5V_standby (default) | 1-2 On |
| +5V | 2-3 On |
| Digital I/O Output State: DIO 3/5/7/9 (JP12), DIO 11/13/15/17 (JP7) | |
| +5V or +5V_standby (default) | 1-2 On |
| GND | 2-3 On |
| Power-on Select | |
| Power-on via Power Button (default) | 1-2 On |
| Power-on via AC Power | 2-3 On |
| Mini PCIe Power Select | |
| +3.3V (default) | 1-2 On |
| +3V_standby | 2-3 On |



Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.