



# DFI®

## KU553

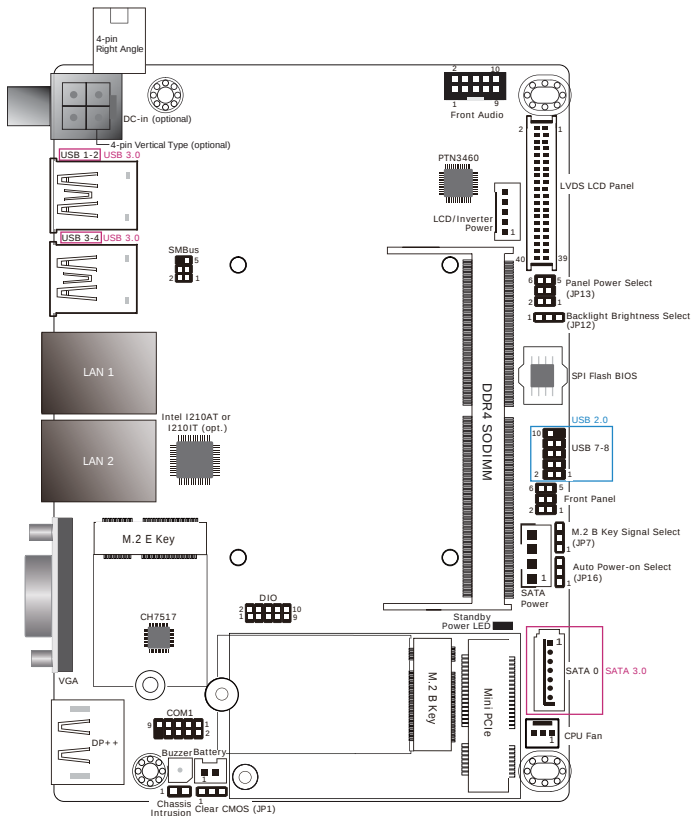

TOP

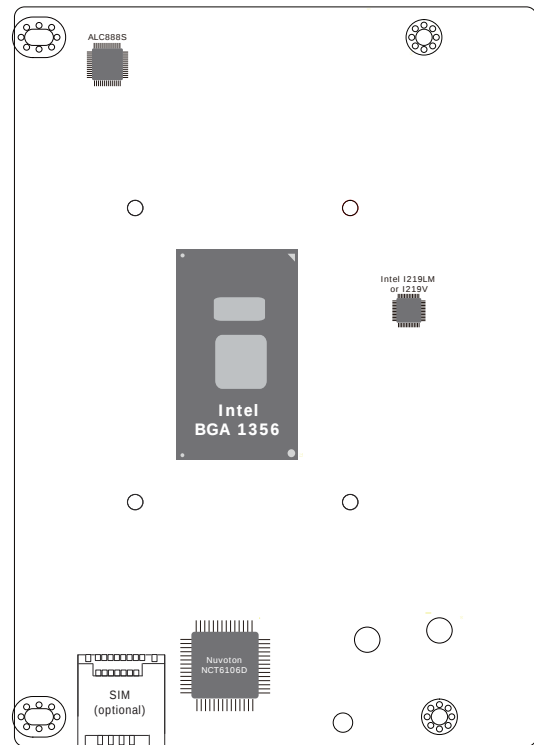

BOTTOM

| Backlight Brightness Select | JP12   |
|-----------------------------|--------|
| +3.3V (default)             | 1-2 On |
| +5V                         | 2-3 On |

| M.2 B Key Signal Select | JP7    |
|-------------------------|--------|
| SATA (default)          | 1-2 On |
| PCIe                    | 2-3 On |

| Auto Power-on Select                | JP16   |
|-------------------------------------|--------|
| Power-on via power button (default) | 1-2 On |
| Power-on via AC power               | 2-3 On |

| Clear CMOS       | JP1    |
|------------------|--------|
| Normal (default) | 1-2 On |
| Clear CMOS       | 2-3 On |

| Panel Power Select | JP13   |
|--------------------|--------|
| +12V               | 1-2 On |
| +5V                | 3-4 On |
| +3.3V (default)    | 5-6 On |

## Battery Notice

---



### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.



### Mesure de Sécurité de l'usage de Batterie

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.