


DFI®

GH171

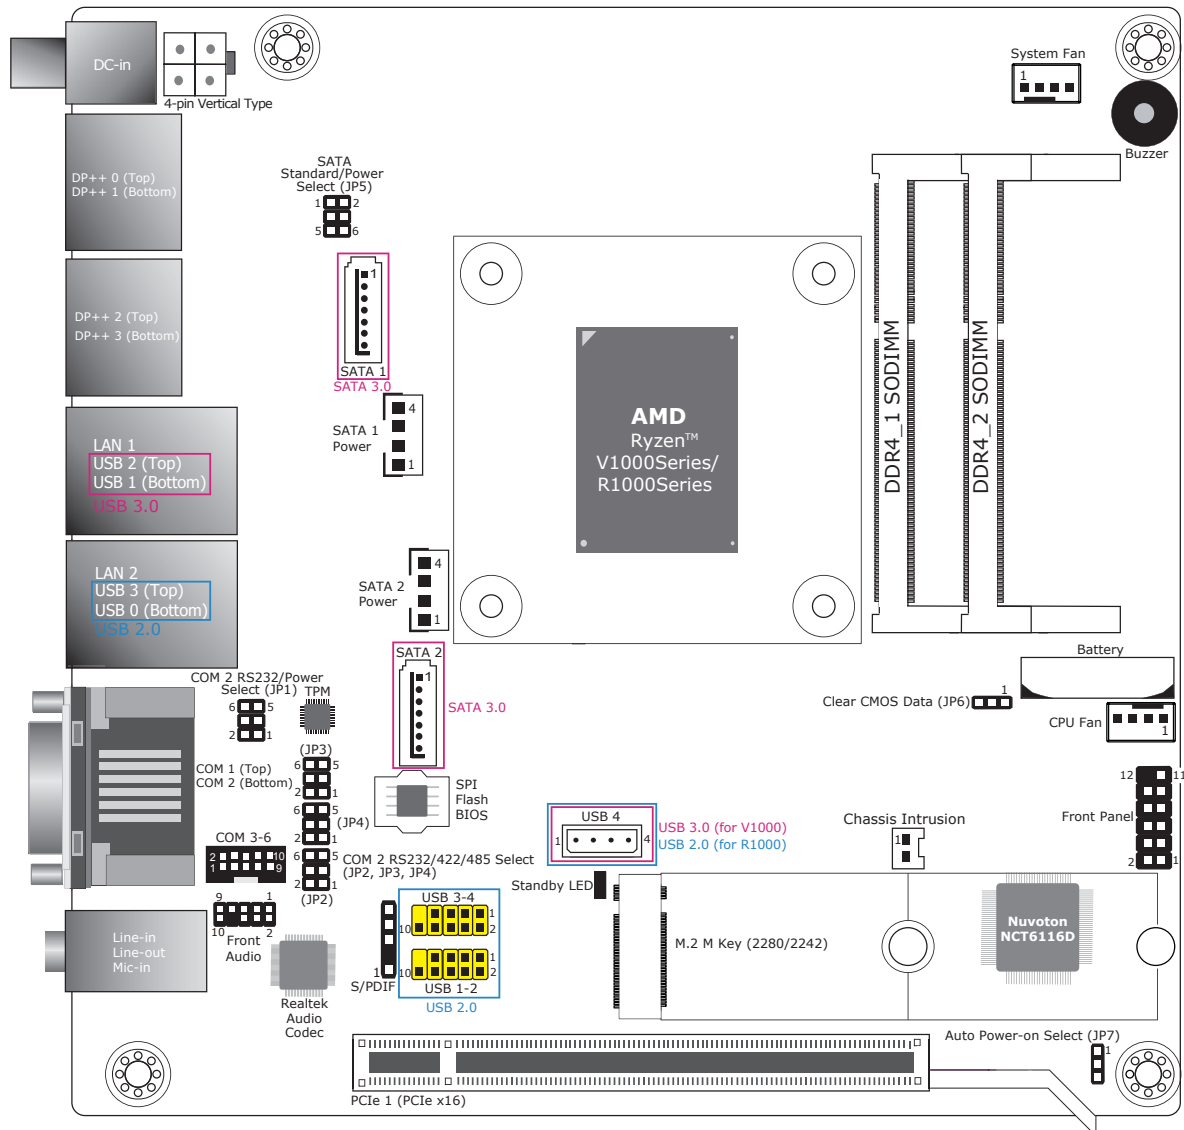

Clear CMOS Data	JP6
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

COM 2 RS232/422/485 Select	JP2	JP3/JP4
RS232 (default)	1-2 On	1-3, 2-4 On
RS422 Full Duplex	3-4 On	3-5, 4-6 On
RS485	5-6 On	3-5, 4-6 On

Front Panel

	Pin	Function		Pin	Function
HD-LED	1	N.C.	PWR-LED	2	LED Power
	3	HDD Power		4	LED Power
	5	Signal		6	Signal
RESET	7	Ground	ATX-SW	8	Ground
	9	RST Signal		10	Signal
	11	N.C.			

COM 2 RS232/Power Select	JP1
RS232 (default)	1-3 (RI-), 2-4 (DCD-) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On

SATA Standard/Power Select	JP5
Standard (default)	1-3, 2-4 On
SATA with pin 7 VCC (+5V)	3-5 (SATA 1), 4-6 (SATA 2) On

Auto Power-on Select	JP7
Power-on via AC power (default)	1-2 On
Power-on via power button	2-3 On

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.