



## M.2-COM4

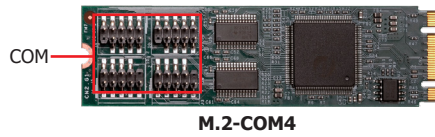

M.2-COM4

### Mechanical Drawing

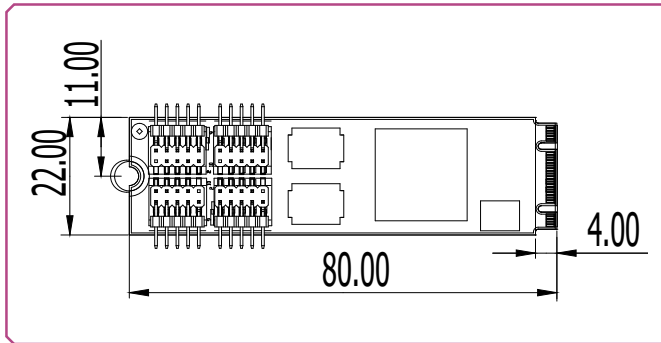

### Features

PORT	RS232/RS422/RS485
MODE	RS232/422/485 Selected by SW
INPUT INTERFACE	PCIe x1
FORM FACTOR	M.2 B-M key

### Specifications

#### I/O CONNECTORS

- RS232/RS422/RS485 functions with DB9 connector.

#### POWER INPUT

- 3.3V via M.2 connector

#### APPLIED MODELS

- All DFI systems and boards with M.2 interface

#### TEMPERATURE

- Operating: -40°C to 85°C
- Storage: -40°C to 85°C

#### HUMIDITY

- 5% to 90%

#### FORM FACTOR

- M.2 B-M Key 22mm x 80mm (4 ports)

#### REGULATION

- CE/FCC class B/RoHS



### Packing List

• 1 M.2 serial port module	
• 4 COM port cable (Length: 250mm)	A81-015011-001G

### Ordering Information

Model Name	P/N	Form Factor	Port Number	Photo
M.2-COM4	770-M2COM1-000G	M.2 B-M key, 22mm x 80mm	4 ports	
M.2-2RS232	770-M22321-000G	M.2 B-M key, 22mm x 42mm	2 ports	
M.2-2RS422	770-M24221-000G	M.2 B-M key, 22mm x 42mm	2 ports	
M.2-2RS485	770-M24851-000G	M.2 B-M key, 22mm x 42mm	2 ports	