

RM641



microATX ATX

► Features

- 4U rackmount chassis for ATX/microATX motherboard
- Up to 1x 3.5"/2.5" SATA drive bay and 3x optical drive bays
- Front-accessible system fan and USB interfaces
- Supports 7 expansion slots
- Designed for industrial server application

► Panel




Front View



Rear View

► Dimensions

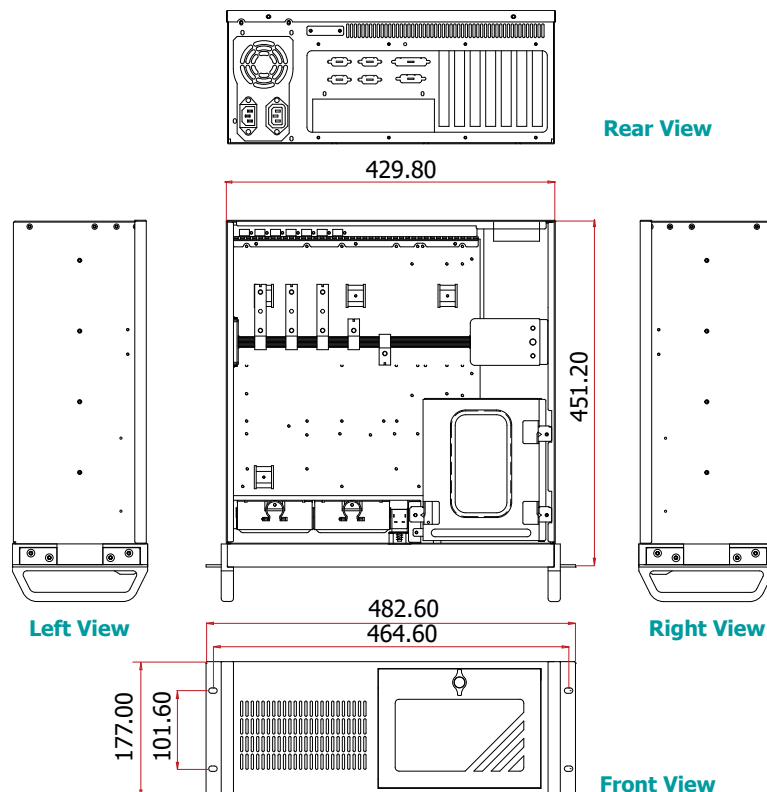

► Specifications

STORAGE		3 x 5.25" Optical Drive Bays (Front Accessible) 1 x 3.5"/2.5" SATA Drive Bay (Front Accessible)
EXPANSION		7 x Expansion Slot
LED	Indicators	1 x Power LED 1 x HDD LED
I/O	Front	1 x Drive Panel Door With Keylock 2 x USB 2.0 Cutout
	Rear	2 x DB-9 Cutout
	Buttons	1 x Power Switch 1 x Reset Switch
COOLING	Fan	2 x 92cm System Fan with Quick Access Filter
POWER	Supply	ATX PS/2 Power Supply 500W AC Power Input : 90~264V
MECHANISM	Construction	SECC
	Mounting	Flexible Hold Down Bar
	Dimensions (W x H x D)	483mm x 177mm x 451mm
	Weight	21.7kg
ENVIRONMENT	Operating Temperature	0 to 45°C
	Storage Temperature	-20 to 60°C
	Relative Humidity	0 to 90% RH (non-condensing)
STANDARDS AND CERTIFICATIONS	Shock	Operating: 3G Non-operating: 10G
	Vibration	Operating: Random 5~500Hz 1G Non-operating: Sweep Sine 10~500Hz 1.5G
	Package Drop	ISTA Project 1A

► Ordering Information

Model Name	Part Number	Description
RM641	7A0-RM6410-100G	RM641 Chassis, 500W Power, 3.5" to 2.5" HDD Bracket, RoHS
	623-RM4U04-000G	RM641 Chassis, RoHS

► Optional Items

Optional Items	Part Number	Description
HDD Bracket	622-050050-000G	5.25" to 3.5" HDD Bracket
SSD Bracket	A31-028264-000G	3.5" to 2.5" SSD Bracket
Power Supply	671-330005-000G	ATX PS/2, 300W, 24pin, RoHS
	671-350001-000G	ATX PS/2, 500W, 100~240V, RoHS
Power Cord	785-PWRD	Power Cord, Standards (USA/EUR/CH), 1.8m, RoHS

► Packing List

- 1 RM641 Chassis