

## RM641



**microATX ATX**

### ► Features

- 4U rackmount chassis for ATX/microATX motherboard
- Up to 1x 3.5"/2.5" SATA drive bay and 3x optical drive bays
- Front-accessible system fan and USB interfaces
- Supports 7 expansion slots
- Designed for industrial server application

### ► Panel




Front View



Rear View

### ► Dimensions

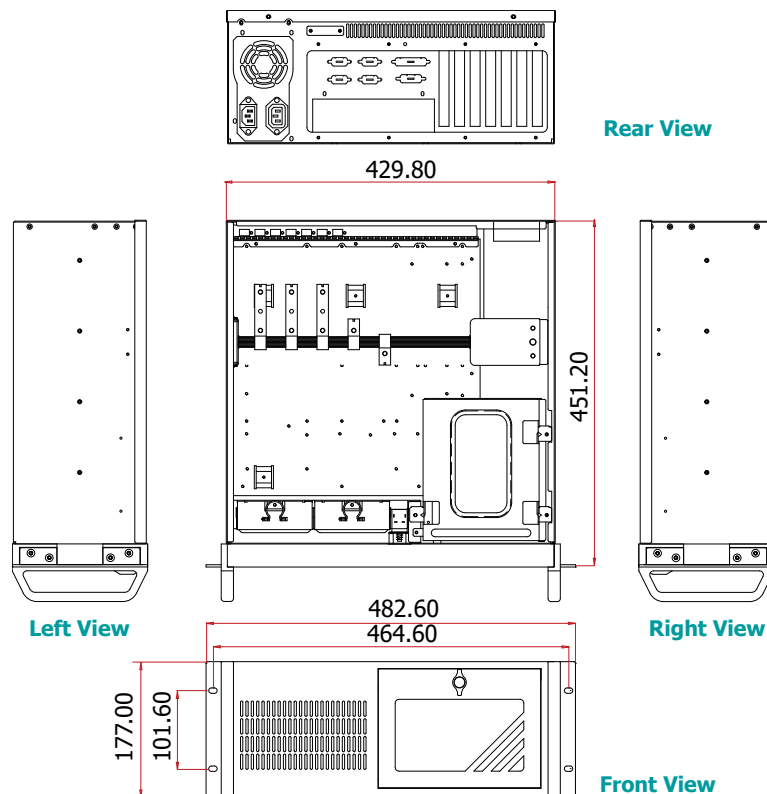

## ► Specifications

<b>STORAGE</b>		3 x 5.25" Optical Drive Bays (Front Accessible) 1 x 3.5"/2.5" SATA Drive Bay (Front Accessible)
<b>EXPANSION</b>		7 x Expansion Slot
<b>LED</b>	<b>Indicators</b>	1 x Power LED 1 x HDD LED
<b>I/O</b>	<b>Front</b>	1 x Drive Panel Door With Keylock 2 x USB 2.0 Cutout
	<b>Rear</b>	2 x DB-9 Cutout
	<b>Buttons</b>	1 x Power Switch 1 x Reset Switch
<b>COOLING</b>	<b>Fan</b>	2 x 92cm System Fan with Quick Access Filter
<b>POWER</b>	<b>Supply</b>	ATX PS/2 Power Supply 500W AC Power Input : 90~264V
<b>MECHANISM</b>	<b>Construction</b>	SECC
	<b>Mounting</b>	Flexible Hold Down Bar
	<b>Dimensions ( W x H x D )</b>	483mm x 177mm x 451mm
	<b>Weight</b>	21.7kg
<b>ENVIRONMENT</b>	<b>Operating Temperature</b>	0 to 45°C
	<b>Storage Temperature</b>	-20 to 60°C
	<b>Relative Humidity</b>	0 to 90% RH (non-condensing)
<b>STANDARDS AND CERTIFICATIONS</b>	<b>Shock</b>	Operating: 3G Non-operating: 10G
	<b>Vibration</b>	Operating: Random 5~500Hz 1G Non-operating: Sweep Sine 10~500Hz 1.5G
	<b>Package Drop</b>	ISTA Project 1A

## ► Ordering Information

Model Name	Part Number	Description
<b>RM641</b>	623-RM4U07-000G	RM641 Chassis, 500W Power, 3.5" to 2.5" HDD Bracket, RoHS
	623-RM4U04-000G	RM641 Chassis, RoHS

## ► Optional Items

Optional Items	Part Number	Description
<b>HDD Bracket</b>	622-050050-000G	5.25" to 3.5" HDD Bracket
<b>SSD Bracket</b>	A31-028264-000G	3.5" to 2.5" SSD Bracket
<b>Power Supply</b>	671-330005-000G	ATX PS/2, 300W, 24pin, RoHS
	671-350001-000G	ATX PS/2, 500W, 100~240V, RoHS
<b>Power Cord</b>	785-PWRD	Power Cord, Standards (USA/EUR/CH), 1.8m, RoHS

## ► Packing List

- 1 RM641 Chassis