


WL171/WL173

ULT

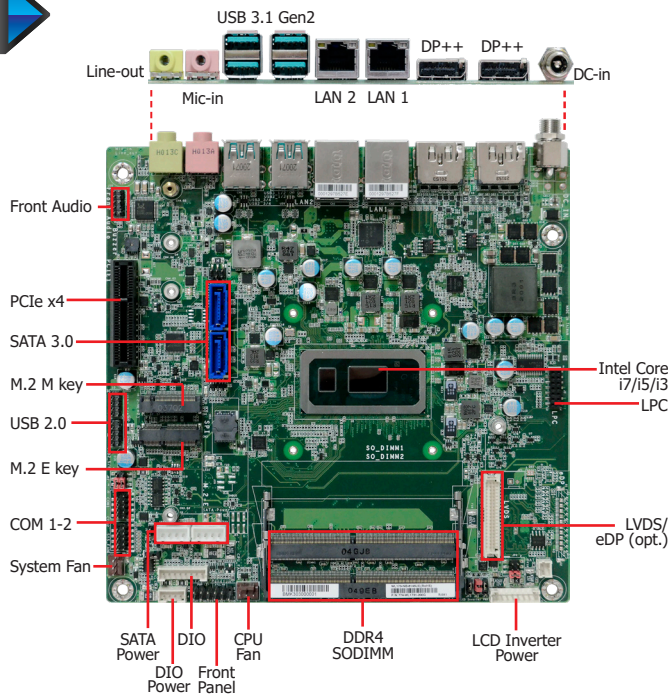

Features

- **DDR4 2400MHz SODIMM up to 32GB**
- **Three independent displays: LVDS/eDP + 2 DP++**
- **DP++ resolution supports up to 4096x2304 @ 60Hz**
- **Multiple expansion: 1 PCIe x4, 1 M.2 M Key (PCIe x4/SATA), 1 M.2 E key (PCIe/USB)**
- **Storage: 2 SATA 3.0**
- **Rich I/O: 2 Intel GbE, 4 USB 3.1, 4 USB 2.0**

* Populated by default




Note: If you would like to have the CPU configuration which is not listed on our ordering, please contact our sales representative.


Ordering Information

Model Name	P/N	Processor	DP++	LVDS/eDP	GbE	SATA3.0	COM	USB3.1 Gen2	USB2.0	Power Connector	TPM 2.0	Voltage	Temp.
WL171-NE-8665UE	770-WL1711-000G	I7-8665UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	12V	-20 to 70°C
WL171-NE-8365UE	770-WL1711-100G	I5-8365UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	12V	-20 to 70°C
WL171-NB-8145UE	770-WL1711-200G	I3-8145UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	12V	-5 to 65°C
WL171-NB-4305UE	770-WL1711-300G	Celeron 4305UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	12V	-5 to 65°C
WL173-NE-8665UE	770-WL1731-000G	I7-8665UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	9-36V	-20 to 70°C
WL173-NE-8365UE	770-WL1731-100G	I5-8365UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	9-36V	-20 to 70°C
WL173-NB-8145UE	770-WL1731-200G	I3-8145UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	9-36V	-5 to 65°C
WL173-NB-4305UE	770-WL1731-300G	Celeron 4305UE	2	LVDS	2	2	2	4	4	DC jack	Onboard	9-36V	-5 to 65°C

Mechanical Drawing

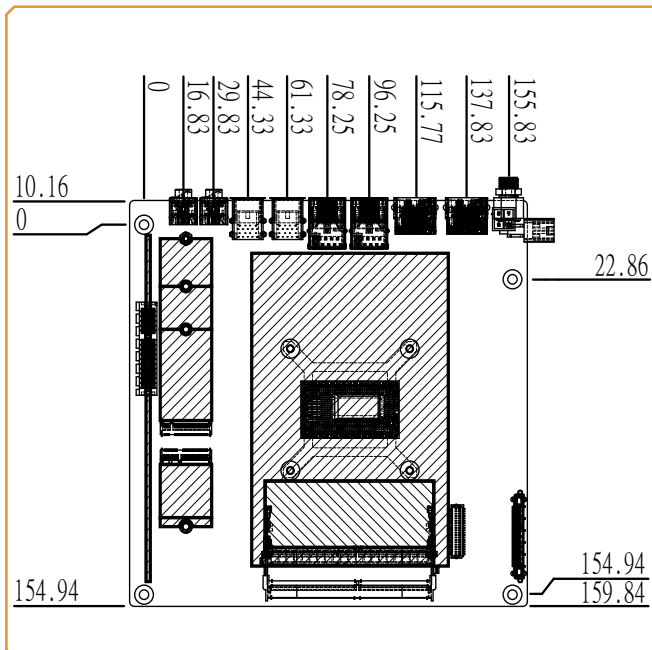

Block Diagram

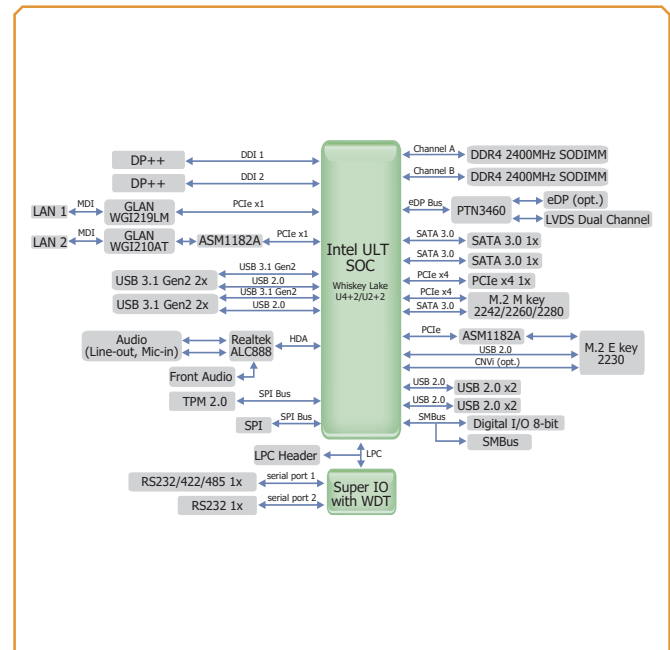

Specifications

Model Name		WL171		WL173	
SYSTEM	Processor	8th Generation Intel® Core™ Processors, BGA 1528 Intel® Core™ i7-8665UE, Quad Core, 8M Cache, 1.7GHz (4.4GHz), 15W Intel® Core™ i5-8365UE, Quad Core, 6M Cache, 1.6GHz (4.1GHz), 15W Intel® Core™ i3-8145UE, Dual Core, 4M Cache, 2.2GHz (3.9GHz), 15W Intel® Core™ Celeron® 4305UE, Dual Core, 2M Cache, 2.0GHz (2.0GHz), 15W			
	Memory	2 x 260-pin SODIMM up to 32GB DDR4 2400MHz/DDR4 2133MHz (for Celeron 4305UE)		2 x 260-pin SODIMM up to 32GB DDR4 2400MHz/DDR4 2133MHz (for Celeron 4305UE)	
	BIOS	AMI SPI 128Mbit		AMI SPI 128Mbit	
	Controller	Intel® UHD Graphics 620/ Intel® UHD Graphics 610 (for Celeron 4305UE)		Intel® UHD Graphics 620/ Intel® UHD Graphics 610 (for Celeron 4305UE)	
GRAPHICS	Feature	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: H.264/AVC, VP8, VP9, VP9 10 Bit, H.265/HEVC 8 bit, H.265/HEVC 10 bit, MPEG2, MJPEG, VC-1 HW Encode: H.264/AVC, VP8*, VP9*, H.265/HEVC 8 bit, H.265/HEVC 10 bit, MPEG2, MJPEG (*VP8 and VP9 encode is not supported by Windows OS)		OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: H.264/AVC, VP8, VP9, VP9 10 Bit, H.265/HEVC 8 bit, H.265/HEVC 10 bit, MPEG2, MJPEG, VC-1 HW Encode: H.264/AVC, VP8*, VP9*, H.265/HEVC 8 bit, H.265/HEVC 10 bit, MPEG2, MJPEG (*VP8 and VP9 encode is not supported by Windows OS)	
	Display	1 x LVDS/eDP (opt.) 2 x DP++ LVDS: resolution up to 1920x1200 @ 60Hz eDP: resolution up to 4096x2160 @ 60Hz DP++: resolution up to 4096x2304 @ 60Hz		1 x LVDS/eDP (opt.) 2 x DP++ LVDS: resolution up to 1920x1200 @ 60Hz eDP: resolution up to 4096x2160 @ 60Hz DP++: resolution up to 4096x2304 @ 60Hz	
	Triple Displays	LVDS/eDP + 2 DP++		LVDS/eDP + 2 DP++	
	Interface	1 x PCIe x4 (Gen 3) 1 x M.2 2242/2260/2280 M key (PCIe x4/SATA) (Support NVMe and Intel® Optane memory) 1 x M.2 2230 E key (PCIe/USB)		1 x PCIe x4 (Gen 3) 1 x M.2 2242/2260/2280 M key (PCIe x4/SATA) (Support NVMe and Intel® Optane memory) 1 x M.2 2230 E key (PCIe/USB)	
EXPANSION	Audio Codec	Realtek ALC888S-VD2-GR		Realtek ALC888S-VD2-GR	
AUDIO	Controller	1 x Intel® I210AT PCIe (10/100/1000Mbps) 1 x Intel® I219LM PCIe with iAMT11.6 and vPro (10/100/1000Mbps) (only Core i7/i5 supports iAMT)		1 x Intel® I210AT PCIe (10/100/1000Mbps) 1 x Intel® I219LM PCIe with iAMT11.6 and vPro (10/100/1000Mbps) (only Core i7/i5 supports iAMT)	
ETHERNET	Ethernet	2 x GbE (RJ-45)		2 x GbE (RJ-45)	
	USB	4 x USB 3.1 Gen2		4 x USB 3.1 Gen2	
	Display	2 x DP++		2 x DP++	
	Audio	1 x Line-out 1 x Mic-in		1 x Line-out 1 x Mic-in	
REAR I/O	Serial	1 x RS-232/422/485 (RS-232 w/ power) (2.0mm pitch) 1 x RS-232 (2.0mm pitch)		1 x RS-232/422/485 (RS-232 w/ power) (2.0mm pitch) 1 x RS-232 (2.0mm pitch)	
	USB	4 x USB 2.0 (2.0mm pitch)		4 x USB 2.0 (2.0mm pitch)	
	Display	1 x LVDS Header (default) 1 x eDP Connector (opt.)		1 x LVDS Header (default) 1 x eDP Connector (opt.)	
	Audio	1 x Front Audio Header		1 x Front Audio Header	
	SATA	2 x SATA 3.0 (up to 6Gb/s) 2 x SATA Power RAID 0/1/5		2 x SATA 3.0 (up to 6Gb/s) 2 x SATA Power RAID 0/1/5	
	DIO	1 x 8-bit DIO 1 x DIO Power		1 x 8-bit DIO 1 x DIO Power	
	LPC	1 x LPC		1 x LPC	
	SMBus	1 x SMBus		1 x SMBus	
INTERNAL I/O	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds		System Reset, Programmable via Software from 1 to 255 Seconds	
WATCHDOG TIMER	TPM	dTPM 2.0		dTPM 2.0	
SECURITY	Type	Single 12V +/-5% DC		Wide Range 9~36V	
	Connector	DC-in Jack Right Angle Connector (4-pin) (available upon request) Straight Type Connector (4-pin) (available upon request)		DC-in Jack Right Angle Connector (4-pin) (available upon request) Straight Type Connector (4-pin) (available upon request)	
	RTC Battery	CR2032 Coin Cell		CR2032 Coin Cell	
	OS SUPPORT	Microsoft Linux	Windows 10 IoT Enterprise 64-bit Debian 8 (with VESA graphic driver) Fedpra CentOS 7 (with VESA graphic driver) Yocto 2.6 Linux		Windows 10 IoT Enterprise 64-bit Debian 8 (with VESA graphic driver) Fedpra CentOS 7 (with VESA graphic driver) Yocto 2.6 Linux
ENVIRONMENT	Temperature	Operating: -5 to 65°C / -20 to 70°C Storage: -40 to 85°C		Operating: -5 to 65°C / -20 to 70°C Storage: -40 to 85°C	
	Humidity	Operating: 5 to 90% RH		Operating: 5 to 90% RH	
	MTBF	TBD		TBD	
MECHANICAL	Dimensions	Mini-ITX Form Factor , 170mm (6.7") x 170mm (6.7")		Mini-ITX Form Factor , 170mm (6.7") x 170mm (6.7")	
	Height	PCB: 1.6mm Top Side: 16.5mm Bottom Side: 3.5mm		PCB: 1.6mm Top Side: 16.5mm Bottom Side: 3.5mm	

Packing List

• 1 WL171/WL173 motherboard	
• 1 COM port cable (Length: 250mm, 1 x COM ports)	A81-015011-001G
• 1 Serial ATA data with power cable (Length: 300mm)	A81-002013-000G
• 1 Heat sink	

Optional Items

• USB 2.0 port cable (Length: 200mm)	A81-001032-016G
• COM port cable (Length: 250mm, 1 x COM ports)	A81-015011-001G
• Serial ATA data with power cable (Length: 300mm)	A81-002013-000G
• I/O shield	A49-WL1710-000G