

WM343-CS330 H310 Q370

8th/9th Gen Intel® Core™
Desktop Box IPC

KEY FEATURES



Upgraded CPU

Powered by 8th/9th Gen Intel® Core™




Triple Independent Display

VGA + DVI-D + DP++



4 Expansion Slots

3.5"/2.5" SATA + 5.25" optical drive bay



Multiple Expansion

Support 1 PCIe x16, 1 PCIe x4, 2 PCI, 1 Mini-PCIe socket



15 Years Long Term Support


15-Year CPU Life Cycle Support Until Q3' 33



PANEL




Front View

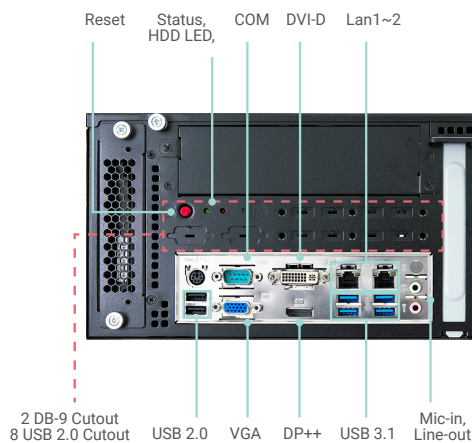


Rear View

DIMENSIONS

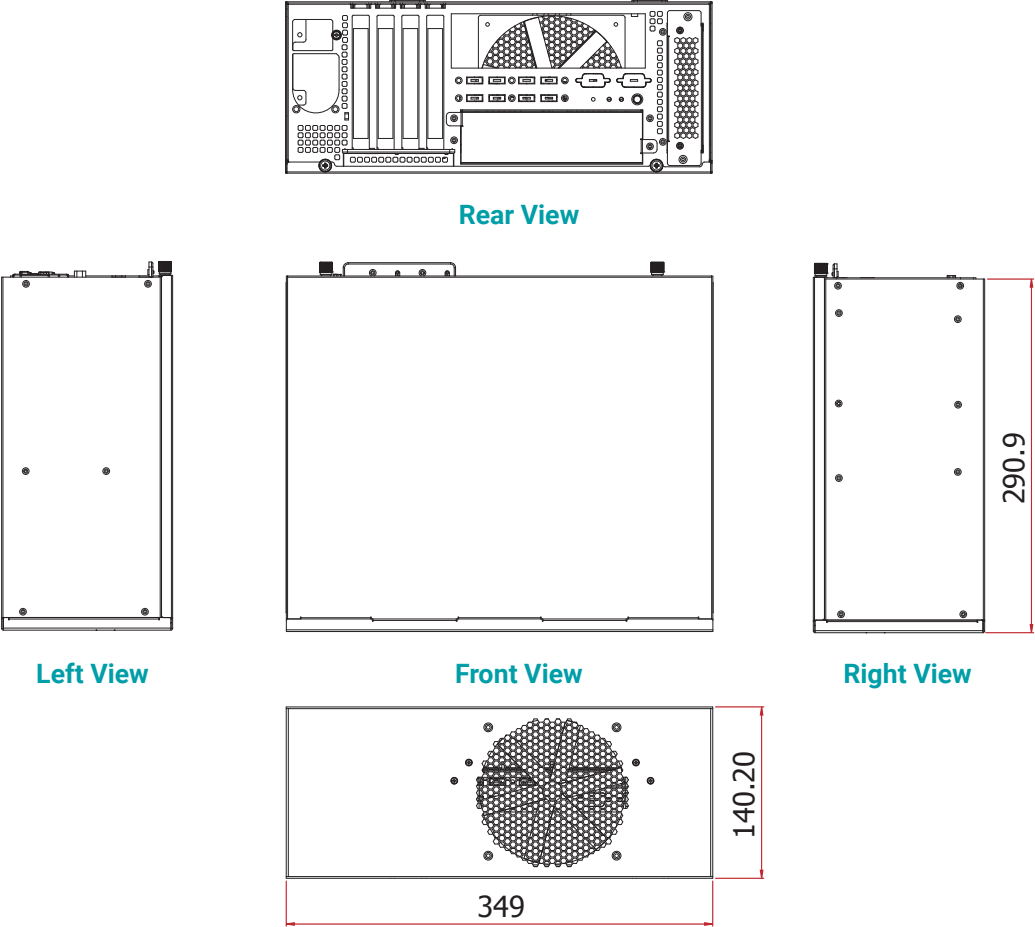

WALL MOUNTING

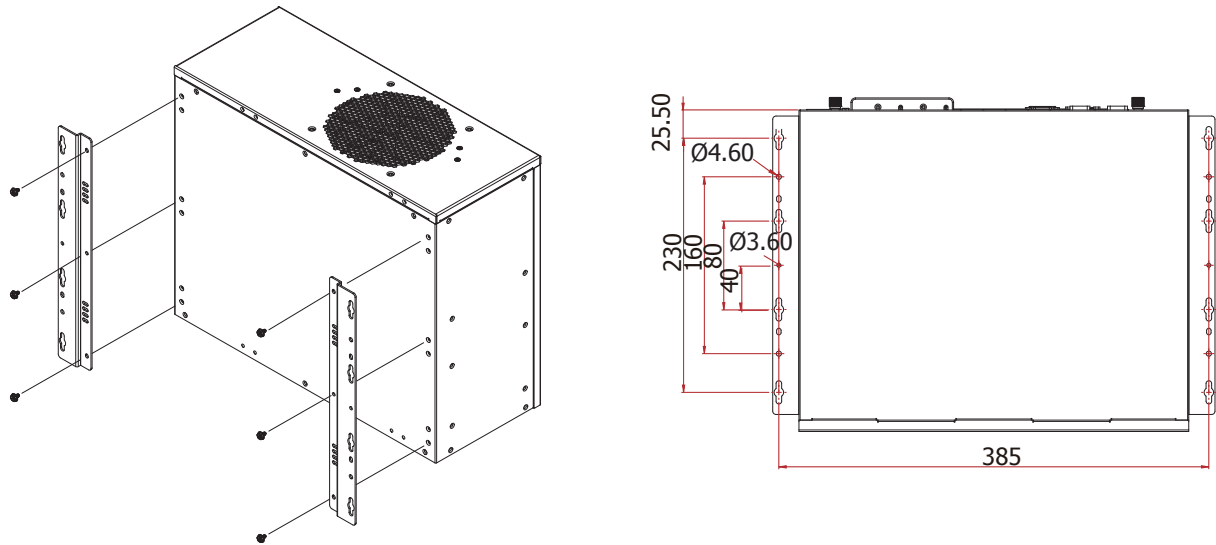

SPECIFICATION

Model Name		WM343-CS330-Q370	WM343-CS330-H310
SYSTEM	Processor	8th Generation Intel® Core™ /Pentium®/Celeron® LGA 1151 Socket Processors: Intel® Core™ i7-8700K (6 Cores, 12M Cache, up to 4.7 GHz); 95W Intel® Core™ i7-8700 (6 Cores, 12M Cache, up to 4.6 GHz); 65W Intel® Core™ i7-8700T (6 Cores, 12M Cache, up to 4.0 GHz); 35W Intel® Core™ i5-8500 (6 Cores, 9M Cache, up to 4.1 GHz); 65W Intel® Core™ i5-8500T (6 Cores, 9M Cache, up to 3.5 GHz); 35W Intel® Core™ i3-8100 (4 Cores, 6M Cache, 3.6 GHz); 65W Intel® Core™ i3-8100T (4 Cores, 6M Cache, to 3.1 GHz); 35W Intel® Pentium® G5400 (2 Cores, 4M Cache, 3.7 GHz); 58W Intel® Pentium® G5400T (2 Cores, 4M Cache, 3.1 GHz); 35W Intel® Celeron® G4900 (2 Cores, 2M Cache, 3.1 GHz); 54W Intel® Celeron® G4900T (2 Cores, 2M Cache, 2.9 GHz); 35W 9th Generation Intel® Core™ LGA 1151 Socket Processors: Intel® Core™ i9-9900K (8 Cores, 16M Cache, up to 5.0 GHz); 95W (Non-LTS) Intel® Core™ i7-9700TE (8 Cores, 12M Cache, up to 3.8 GHz); 35W Intel® Core™ i5-9500E (6 Cores, 9M Cache, up to 4.2 GHz); 65W Intel® Core™ i5-9500TE (6 Cores, 9M Cache, up to 3.6 GHz); 35W Intel® Core™ i3-9100E (4 Cores, 6M Cache, 3.7 GHz); 65W Intel® Core™ i3-9100TE (4 Cores, 6M Cache, to 3.2 GHz); 35W	
	Chipset	Intel® Q370 Chipset	Intel® H310 Chipset
	Memory	Four 288-pin DIMM up to 128GB Dual Channel DDR4 2400/2666 MHz	Two 288-pin DIMM up to 64GB Dual Channel DDR4 2400/2666 MHz
	BIOS	AMI SPI 128Mbit	AMI SPI 128Mbit
	Controller	Intel® HD Gen 9 Graphics	Intel® HD Gen 9 Graphics
GRAPHICS	Feature	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Decode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Decode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9
	Display	1 x VGA 1 x DVI-I (DVI-D signal) 1 x DP++ VGA: resolution up to 1920x1200@60Hz DVI-D: resolution up to 1920x1200@60Hz DP++: resolution up to 4096x2160@60Hz	1 x VGA 1 x DVI-I (DVI-D signal) 1 x DP++ VGA: resolution up to 1920x1200@60Hz DVI-D: resolution up to 1920x1200@60Hz DP++: resolution up to 4096x2160@60Hz
	Multiple Displays	Triple Displays: VGA & DVI-D & DP++	Dual Displays: VGA & DVI-D / VGA & DP++ / DP++ & DVI-D
	Controller	Intel® HD Gen 9 Graphics	Intel® HD Gen 9 Graphics
STORAGE	External	1 or 2 x 3.5"/2.5" SATA 3.0 drive bays (1 x 3.5" SATA drive bay, by default) 1 x 5.25" Optical drive bay	1 or 2 x 3.5"/2.5" SATA 3.0 drive bays (1 x 3.5" SATA drive bay, by default) 1 x 5.25" Optical drive bay
	Internal	1 x mSATA	1 x mSATA
	Interface	1 x PCIe x16 (Gen 3) 1 x PCIe x4 (Gen 3) 2 x PCI 1 x Full-size Mini PCIe (USB/PCIe/mSATA, PCIe by default)	1 x PCIe x16 (Gen 3) 1 x PCIe x4 (Gen 2) 2 x PCI
AUDIO	Audio Codec	Realtek ALC888	Realtek ALC888
	Interface	1 x Line-out 1 x Mic-in 1 x Line-in (opt.)	1 x Line-out 1 x Mic-in 1 x Line-in (opt.)
ETHERNET	Controller	1 x Intel® I211AT (10/100/1000Mbps) 1 x Intel® I219V (10/100/1000Mbps)	1 x Intel® I211AT (10/100/1000Mbps) 1 x Intel® I219V (10/100/1000Mbps)
LED	Indicators	1 x Power LED 1 x HDD LED	1 x Power LED 1 x HDD LED
REAR I/O	Ethernet	2 x GbE (RJ-45)	2 x GbE (RJ-45)
	Serial	1 x RS-232/422/485 (RS-232 w/ power) (DB-9)	1 x RS-232/422/485 (RS-232 w/ power) (DB-9)
	USB	4 x USB 3.1 Gen 1 2 x USB 2.0	4 x USB 3.1 Gen 1 2 x USB 2.0
	Display	1 x VGA 1 x DVI-I (DVI-D signal) 1 x DP++	1 x VGA 1 x DVI-I (DVI-D signal) 1 x DP++
	Audio	1 x Line-out 1 x Mic-in 1 x Line-in (opt.)	1 x Line-out 1 x Mic-in 1 x Line-in (opt.)
	PS/2	1 x PS/2 (mini-DIN-6)	1 x PS/2 (mini-DIN-6)
	Buttons	1 x Power button 1 x Reset button	1 x Power button 1 x Reset button
	Cutout	2 x DB-9 Cutout 8 x USB 2.0 Cutout	2 x DB-9 Cutout 8 x USB 2.0 Cutout
	Controller	Intel® HD Gen 9 Graphics	Intel® HD Gen 9 Graphics
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	System Reset, Programmable via Software from 1 to 255 Seconds
SECURITY	TPM	Infineon TPM1.2/2.0 (optional)	Infineon TPM1.2/2.0 (optional)

SPECIFICATION

Model Name		WM343-CS330-Q370	WM343-CS330-H310
POWER	Supply	Flex ATX 150W/250W/350W/400W/500W (250W Default)	Flex ATX 150W/250W/350W/400W/500W (250W Default)
	Fan	1 x 12cm System Fan	1 x 12cm System Fan
OS SUPPORT	Windows	Windows 10	Windows 10
	Linux	Linux	Linux
ENVIRONMENT	Operating Temperature	0 to 45°C	0 to 45°C
	Storage Temperature	0 to 60°C	0 to 60°C
	Relative Humidity	5 to 95% RH (non-condensing)	5 to 95% RH (non-condensing)
MECHANICAL	Construction	Sheet metal	Sheet metal
	Mounting	Wall mount	Wall mount
	Dimensions (W x H x D)	349mm x 140.2mm x 290.9mm (13.74" x 5.52" x 11.45")	349mm x 140.2mm x 290.9mm (13.74" x 5.52" x 11.45")
	Weight	7.7kg	7.7kg
	Color	no coating or black coating	no coating or black coating
STANDARDS AND CERTIFICATIONS	Shock	Operating: 3G Non-operating: 5G	Operating: 3G Non-operating: 5G
	Vibration	Operating: Random 5~500Hz 0.5G Non-operating: Sine 10~500Hz 1.5G	Operating: Random 5~500Hz 0.5G Non-operating: Sine 10~500Hz 1.5G
	Package Drop	ISTA Project 1A	ISTA Project 1A
	Certification	CE, FCC Class A, RoHS	CE, FCC Class A, RoHS

ORDERING INFORMATION

Model Name	Part Number	Description
WM343-CS330	750-WM3436-000G	WM343-CS, uATX System, Black, CS330-H310, 250W, F/G SYSTEM RoHS
WM343-CS330	750-WM3436-100G	WM343-CS, uATX System, Black, CS330-Q370, 250W, F/G SYSTEM RoHS

OPTIONAL ITEMS

Optional Items	Part Number	Description
Wall Mount	761-WM3410-000G	ACCESSORY WALL MOUNT KITS WM34x Series RoHS

PACKING LIST

1 WM343-CS330 System Unit
1 CPU cooler
1 SATA Data Cable (Length: 650mm)
4 HDD Screws
1 Quick Installation Guide
1 PSU Flex ATX 150W/250W/350W/400W/500W (250W Default)
1 System Fan