


ICX610-C621A Server Grade

3rd Gen Intel® Xeon® Scalable Processor Family
ATX



KEY FEATURES

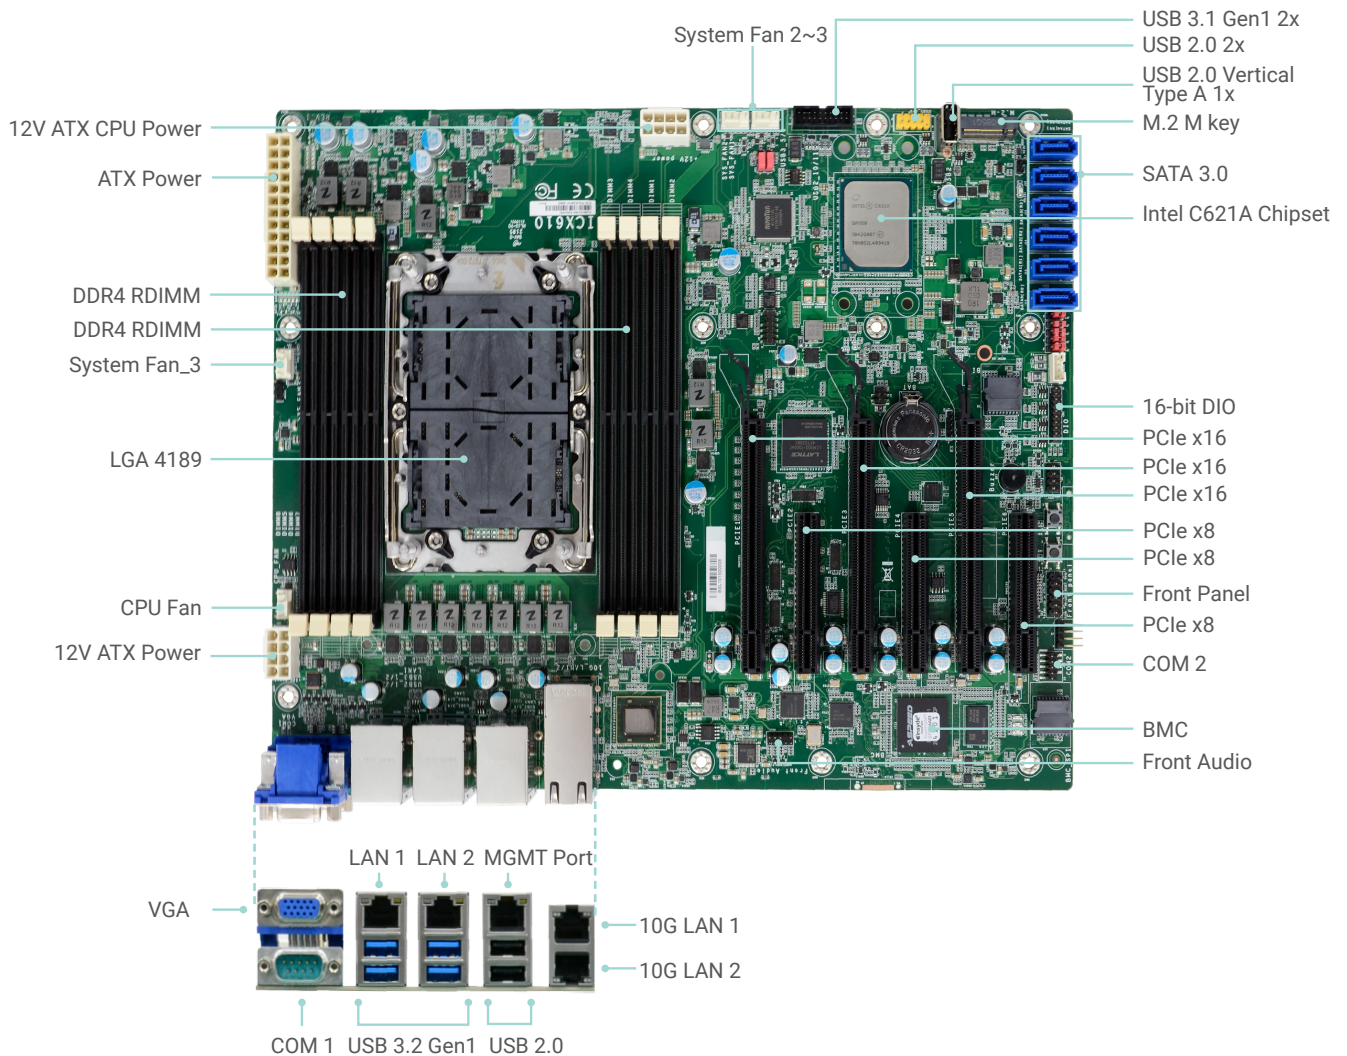

DDR4

8 ECC-RDIMM up to 512GB




10GLAN

2 10GbE



IPMI

OOB Remote Management



Multiple Expansion


3 PCIe x16 (Gen4),
2 PCIe x8 (Gen4),
1 M.2 M key




Rich I/O

2 Intel GbE, 2 COM,
1 Dedicated IPMI,
6 USB 3.1 Gen1,
5 USB 2.0

BLOCK DIAGRAM

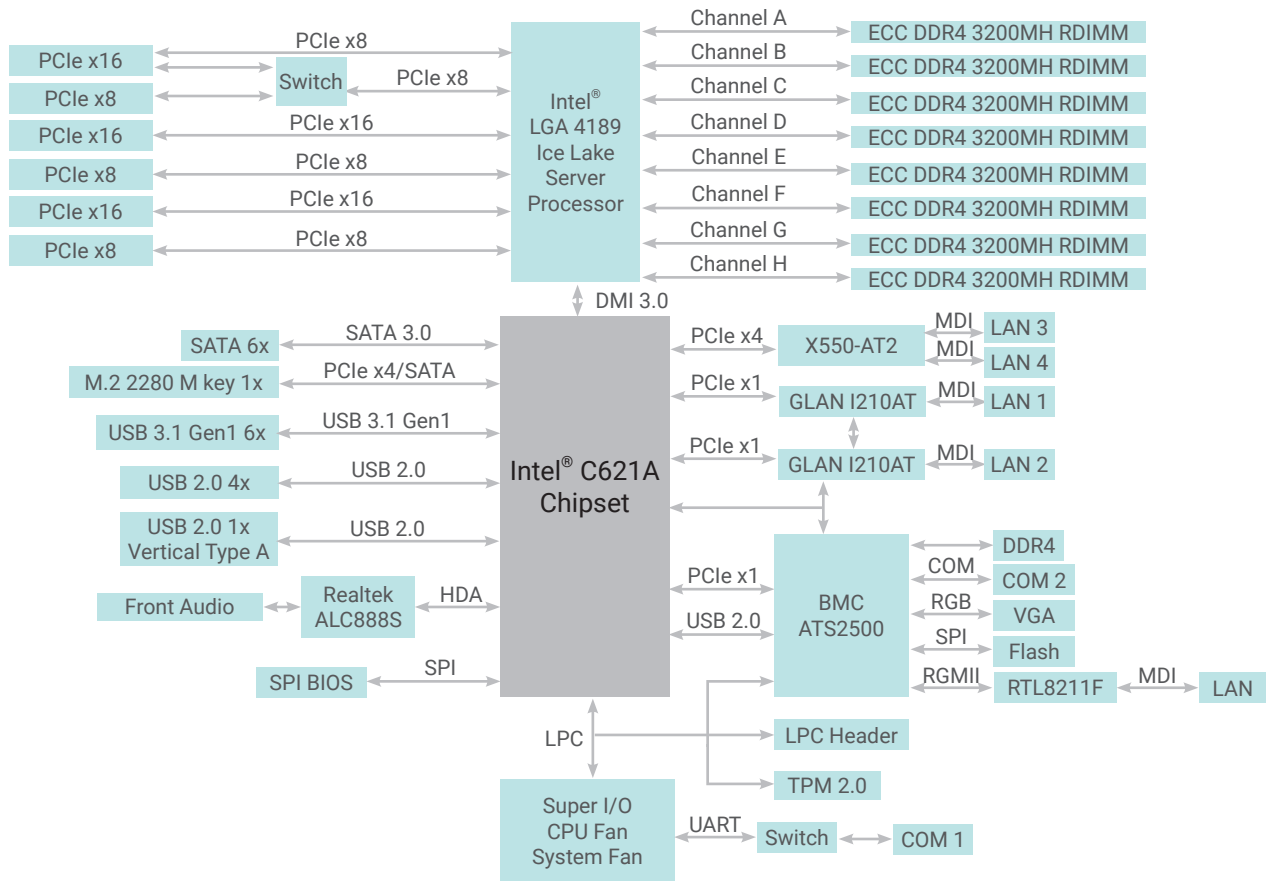

MECHANICAL DRAWING

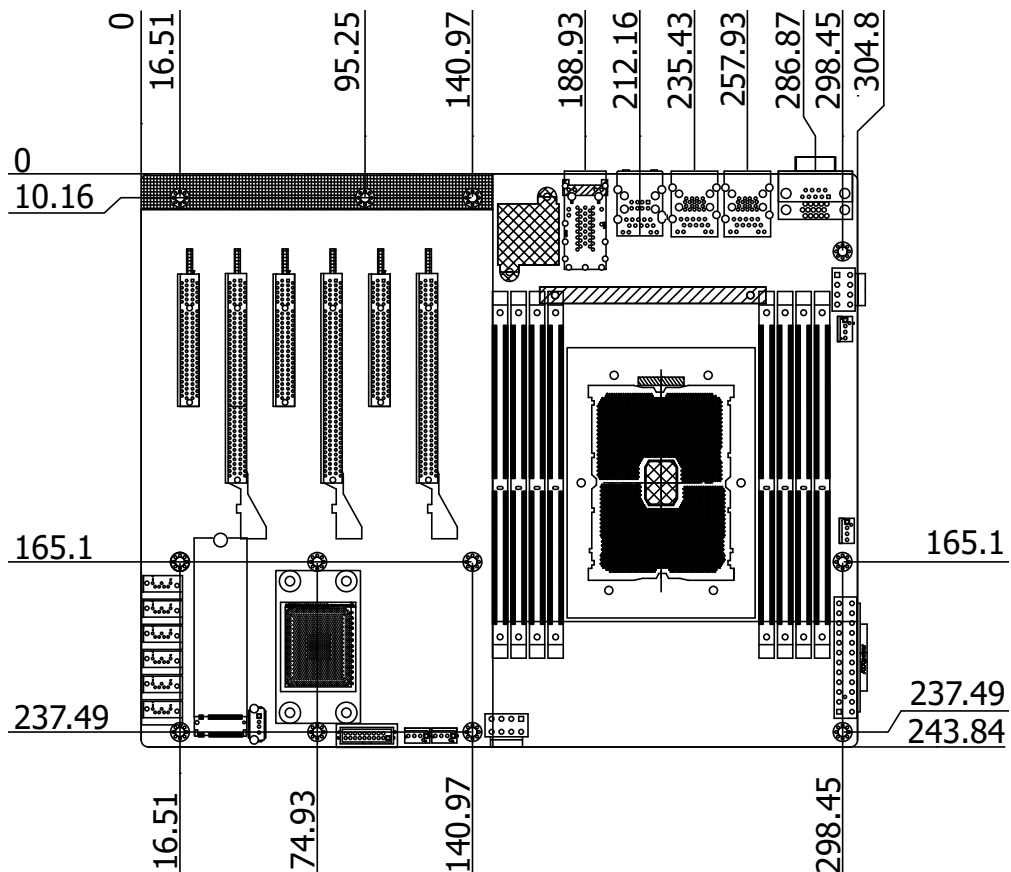

SPECIFICATION

SYSTEM	Processor	3rd Gen Intel® Xeon® Scalable Processor Family, LGA 4189 (Socket P+) Intel® Xeon® Gold 6338N (32 Cores, 48 MB Cache, up to 3.50 GHz) Intel® Xeon® Gold 6338T (24 Cores, 36 MB Cache, up to 3.40 GHz) Intel® Xeon® Gold 6336Y (24 Cores, 36 MB Cache, up to 3.60 GHz) Intel® Xeon® Gold 6330 (28 Cores, 42 MB Cache, up to 3.10 GHz) Intel® Xeon® Gold 6330N (28 Cores, 42 MB Cache, up to 3.40 GHz) Intel® Xeon® Gold 6326 (16 Cores, 24 MB Cache, up to 3.50 GHz) Intel® Xeon® Gold 6314U (32 Cores, 48 MB Cache, up to 3.40 GHz) Intel® Xeon® Gold 6312U (24 Cores, 36 MB Cache, up to 3.60 GHz) Intel® Xeon® Gold 5320T (20 Cores, 30 MB Cache, up to 3.50 GHz) Intel® Xeon® Gold 5318N (24 Cores, 36 MB Cache, up to 3.40 GHz) Intel® Xeon® Gold 5318Y (24 Cores, 36 MB Cache, up to 3.40 GHz) Intel® Xeon® Gold 5317 (12 Cores, 18 MB Cache, up to 3.60 GHz) Intel® Xeon® Gold 5315Y (8 Cores, 12 MB Cache, up to 3.60 GHz) Intel® Xeon® Silver 4316 (20 Cores, 30 MB Cache, up to 3.40 GHz) Intel® Xeon® Silver 4314 (16 Cores, 24 MB Cache, up to 3.40 GHz) Intel® Xeon® Silver 4310 (12 Cores, 18 MB Cache, up to 3.30 GHz) Intel® Xeon® Silver 4310T (10 Cores, 15 MB Cache, up to 3.40 GHz)
	Chipset	Intel® C621A Chipset
	Memory	8 x 288-pin ECC-RDIMM up to 512GB Single Channel DDR4 up to 3200 MHZ
	BIOS	Insyde SPI 128Mbit
	GRAPHICS	Controller
GRAPHICS	Display	1 x VGA VGA: resolution up to 1920x1200 @ 60Hz
	Single Display	VGA
EXPANSION	Interface	3 x PCIe x16 Gen4 slot (#1/#3/#5), 3 x PCIe x8 Gen4 slot (#2/#4/#6) Note: PCIe#1#2 can be auto detected as (x16/0) or (x8/x8) Note: PCIe x8 slot is OPEN edge. 1 x M.2 2280 M key (SATA/PCIe Gen3 x4 NVMe)
	AUDIO	Audio Codec
ETHERNET	Controller	2 x Intel® I210AT PCIe (10/100/1000Mbps) 2 x Intel® X550-AT2 PCIe (10Gbps) IPMI: RTL8211F
REAR I/O	Ethernet	2 x GbE (RJ-45) 2 x 10GbE (RJ-45) 1 x Dedicated IPMI LAN
	Serial	1 x RS-232 (DB-9)
	USB	4 x USB 3.1 Gen1 (w/ RJ45 + USB 3.1 stack) 2 x USB 2.0 (w/ RJ45 + USB 2.0 stack)
	Display	1 x VGA (DB-15)
INTERNAL I/O	USB	2 x USB 3.1 Gen1 2 x USB 2.0 1 x USB 2.0 Vertical Type A
	Serial	1 x RS-232 (2x5-pin)
	Audio	1 x Front Audio Header
	SATA	6 x SATA 3.0 (up to 6Gb/s) RAID 0/1/5/10
	LPC	1 x LPC
	DIO	1 x 16-bit DIO
	SMBus	1 x SMBus
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds
SECURITY	TPM	Infineon TPM2.0
POWER	Type	ATX
	Connector	8-pin ATX 12V CPU power 24-pin ATX power
	Consumption	TBD
	Battery	CR2032 Coin Cell
OS SUPPORT	Windows	Windows 10 IoT Enterprise LTSB RS5(64-bit) Windows Server 2019
	Linux	Ubuntu 20.04
ENVIRONMENT	Temperature	Operating: 0 to 55°C Storage: -40 to 85°C
	Humidity	Operating: 5 to 90% RH, Non-condensing Storage: 5 to 90% RH, Non-condensing
	MTBF	TBD
MECHANISM	Dimensions	ATX Form Factor 305mm (12") x 244mm (9.6")
	Height	PCB: 1.6mm Top Side: 37.34mm
	Certifications	CE, FCC, RoHS, UKCA
STANDARDS AND CERTIFICATIONS		

ORDERING INFORMATION

Model Name	P/N	10GbE	1GbE	IPMI	VGA	COM	USB 3.1 Gen1	USB 2.0	Temperature
ICX610-C621A	770-ICX6101-000G	2	2	1	1	2	6	5	0 to 55°C
ICX610-C621A	770-ICX6101-100G	2	2	0	1	1	6	5	0 to 55°C
ICX610-C621A	770-ICX6101-200G	2	2	0	0	1	6	5	0 to 55°C
ICX610-C621A	770-ICX6101-300G	0	2	0	1	1	6	5	0 to 55°C
ICX610-C621A	770-ICX6101-400G	0	2	1	1	2	6	5	0 to 55°C

PACKING LIST

1 ICX610-C621A Motherboard	770-ICX6101-000G
1 M.2 screw	A32-112016-041G
1 M.2 standoff	A33-725019-090G
1 IO Shield	A49-ICX610-000G
1 Serial ATA data cable (Length: 500mm)	332-553001-005G

OPTIONAL ITEMS

USB 2.0 port cable (Length: 350mm)	A81-001066-016G
USB 3.1 Gen1 cable (Length: 320mm)	A81-001052-023G
Serial ATA data cable (Length: 500mm)	332-553001-005G
2U CPU cooler, LGA 4189 113 x 84 x 71.6mm	A71-101141-000G
4U CPU cooler, LGA 4189 116.7 x 92.5 x 125.5mm	A71-101142-000G