


PT330 Series

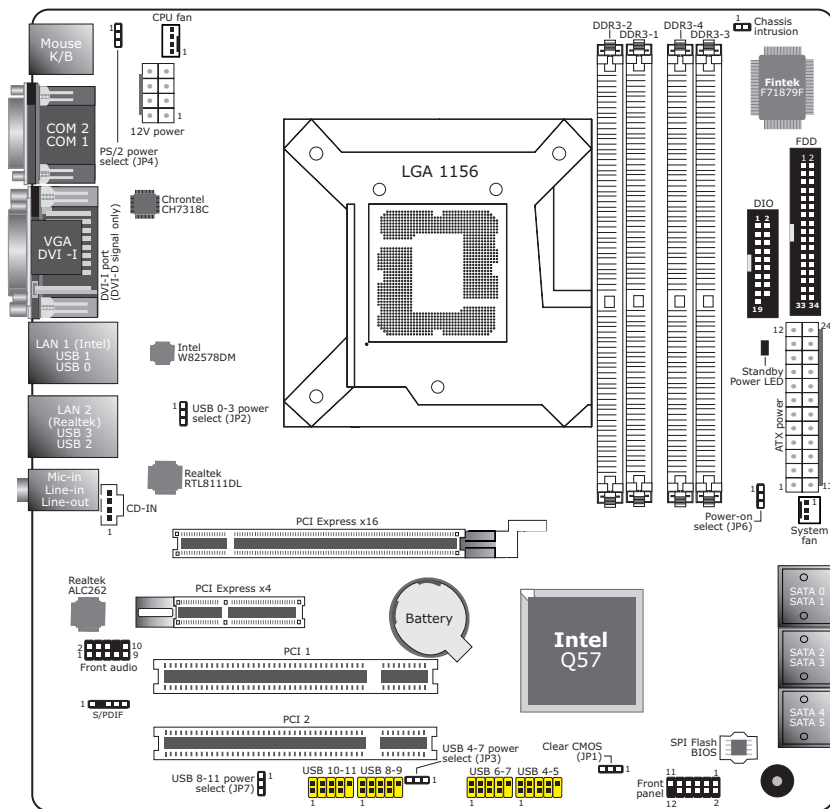

Clear CMOS Data	JP1
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

USB Power: 0-3 (JP2), 4-7 (JP3), 8-11 (JP7)	
5V (default)	1-2 On
5V_standby	2-3 On

Power-on Select	JP6
Power-on via power button (default)	1-2 On
Power-on via AC power;	2-3 On
Power-on via WOL After G3	

PS/2 Power	JP4
5V (default)	1-2 On
5V_standby	2-3 On