


COM33 I-B

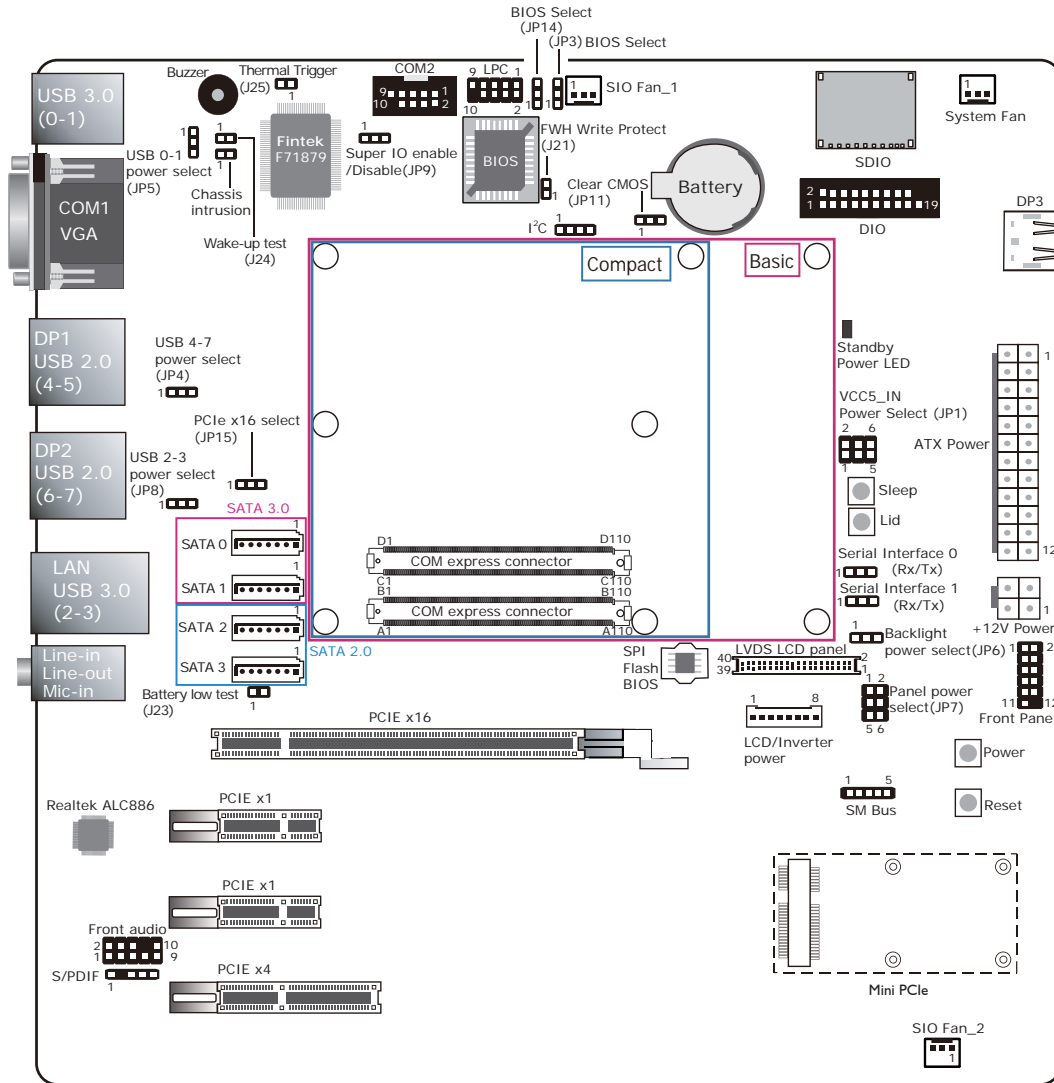

Panel Power Select	JP7
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

USB Power: 0-1 (JP5), 4-7 (JP4), 2-3 (JP8)	
+5V (default)	1-2 On
+5V_standby	2-3 On

Clear CMOS	JP11
Normal (default)	1-2 On
Clear CMOS	2-3 On

JP1	1-2 On	3-4 On	5-6 On
VCC5_IN Power Select	+5VSB (default)	+5V	NC

Super IO Enable/ Disable	JP9
Enable	1-2 On
Disable (default)	2-3 On

Backlight Power Select	JP6
+5V	1-2 On
+3.3V (default)	2-3 On

PCIE x16 Select	JP15
Normal (PCIex16) (default)	1-2 On
Reversed (for cards that support reverse signal)	2-3 On

BIOS Select	JP3	JP14
Module SPI BIOS	1-2 On	1-2 On
Carrier LPC FWH	1-2 On	2-3 On
Carrier SPI0	2-3 On	1-2 On
Module SPI0 (default)	2-3 On	2-3 On

FWH Write Protect	J21
Disable (default)	1-2 Off
Enable	1-2 On