


COM332-B(Rev.A)




▶ Features


- **COM Express® R2.1, Pin-out Type 6**
- **Supports Compact and Basic modules**
- **Multiple displays: VGA, LVDS, DP, eDP**
- **Rich I/O: 1 GbE, 4 USB 3.0, 4 USB 2.0**
- **microATX form factor**

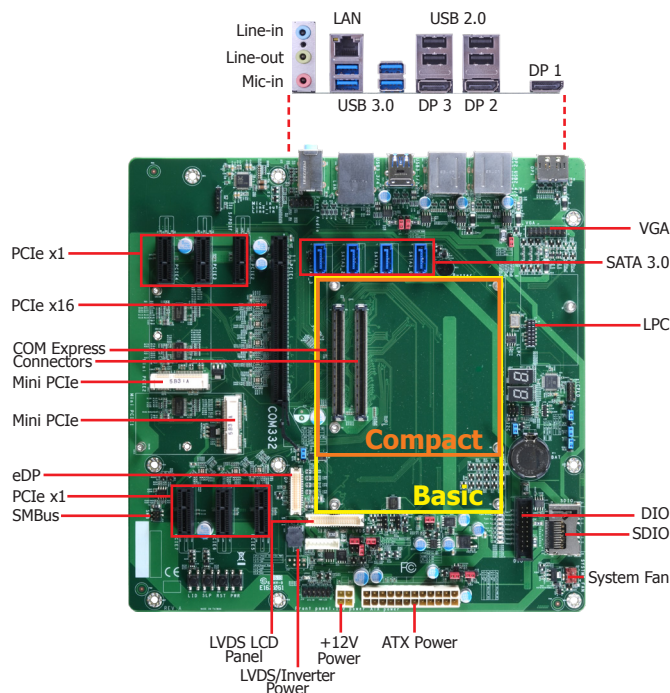

▶ Mechanical Drawing

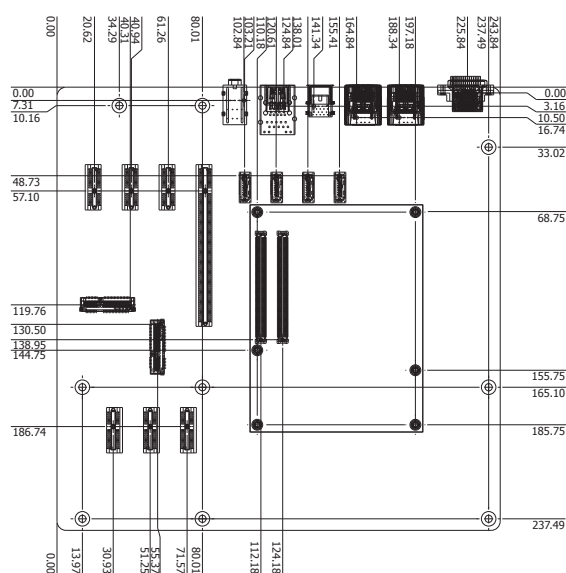

▶ Block Diagram

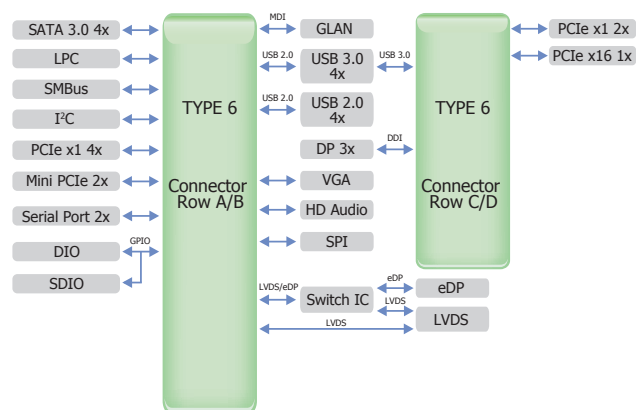

► Specifications

GRAPHICS	Display	1 x VGA 1 x LVDS/eDP (eDP available upon request) 3 x DP 1 x eDP/LVDS (LVDS available upon request)
EXPANSION	Interface	1 x PCIe x16 6 x PCIe x1 2 x Full-size Mini PCIe 1 x SDIO
AUDIO	Audio Codec	Realtek ALC885-VD2-GR
REAR I/O	Ethernet	1 x GbE (RJ-45)
	USB	4 x USB 3.0 4 x USB 2.0
	Display	3 x DP
	Audio	1 x Line-in 1 x Line-out 1 x Mic-in
INTERNAL I/O	Serial	1 x Serial Interface Connector (TX/RX)
	Display	1 x VGA (2.54mm) 1 x LVDS LCD Panel Connector 1 x LCD/Inverter Power 1 x eDP LCD Panel Connector
	Audio	1 x Audio (Line-out/Mic-in) 1 x S/PDIF
	SATA	4 x SATA 3.0 (up to 6Gb/s)
	DIO	1 x 8-bit DIO
	LPC	1 x LPC
	SMBus	1 x SMBus
	POWER	
	Type	12V, 5VSB, VCC_RTC (ATX mode) 12V, VCC_RTC (AT mode)
	Connector	4-pin ATX 12V power 24-pin ATX power
	RTC Battery	CR2032 Coin Cell
ENVIRONMENT	Temperature	Operating: 0 to 60°C Storage: -40 to 85°C
	Humidity	Operating: 5 to 90% RH Storage: 5 to 90% RH
	MTBF	488,117 hrs @ 25°C; 253,684 hrs @ 45°C; 136,621 hrs @ 60°C Calculation Model: Telcordia Issue 2, Method Case 3 Environment: GB, GC – Ground Benign, Controlled
	MECHANICAL	
	Dimensions	microATX Form Factor 244mm (9.6") x 244mm (9.6")
	Compliance	PICMG COM Express® R2.1, Type 6 Basic, Compact Modules

► Ordering Information

Model Name	P/N	GbE	USB 3.0	USB 2.0	Power	Thermal	Temp.
COM332-B(Rev.A)	770-CM3321-000G	1	4	4	ATX/AT	Active	0 to 60°C

► Packing List

• 1 COM332-B(Rev.A) board	
• 1 Serial ATA data cable (Length: 500mm)	332-553001-005G
• 1 VGA cable	A81-012000-000G
• 1 QR (Quick Reference)	

► Optional Items

• Serial ATA data cable (Length: 500mm)	332-553001-005G
• LPC EXT-RS232 module (4 x RS232 ports)	770-EXTRS1-000G
• LPC EXT-RS485 module (4 x RS485 ports)	770-EXTRS1-100G
• I/O shield	A49-COM332-010G