


COM330-B

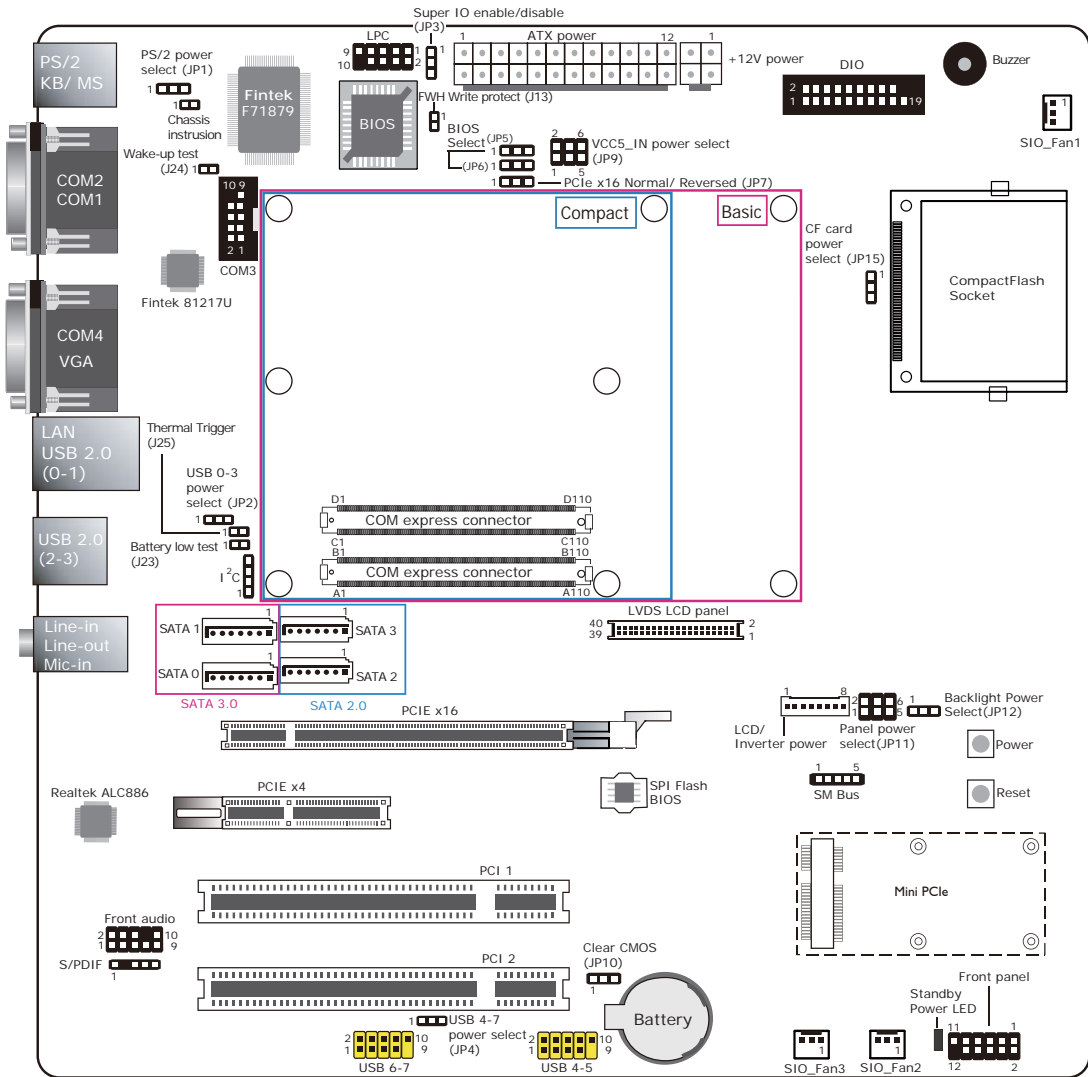

USB Power: 0-3 (JP2), 4-7 (JP4)	
+5V (default)	1-2 On
+5V_standby	2-3 On
PS/2 Power	
+5V (default)	1-2 On
+5V_standby	2-3 On
Clear CMOS	
Normal (default)	1-2 On
Clear CMOS	2-3 On
CF Card Power Select	
+5V	1-2 On
+3.3V (default)	2-3 On
Super IO Enable/Disable	
Enable	1-2 On
Disable (default)	2-3 On
FWH Write Protect	
Disable (default)	1-2 Off
Enable	1-2 On

Backlight Power Select		JP12	
+5V		1-2 On	
+3.3V (default)		2-3 On	
VCC5_IN Power Select		JP9	
+5V_standby (default)		1-2 On	
+5V		3-4 On	
NC		5-6 On	
PCIex16 Normal/ Reversed		JP7	
Normal (PCIex16) (default)		1-2 On	
Reversed (for cards that support reverse signal)		2-3 On	
Panel Power Select		JP11	
+12V		1-2 On	
+5V		3-4 On	
+3.3V (default)		5-6 On	
BIOS Select		JP6	JP5
Module SPI BIOS		1-2 On	1-2 On
Carrier LPC FWH		1-2 On	2-3 On
Carrier SPI0		2-3 On	1-2 On
Module SPI0 (Default)		2-3 On	2-3 On