



DFI®

CM901-B

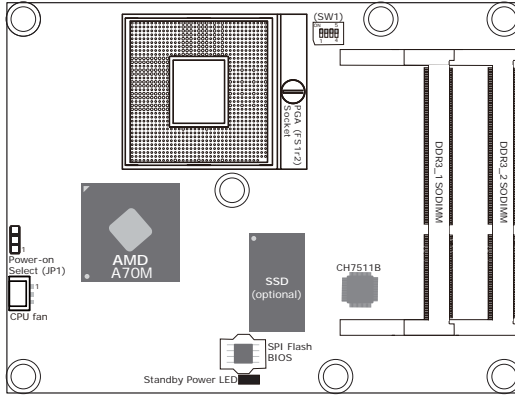

TOP

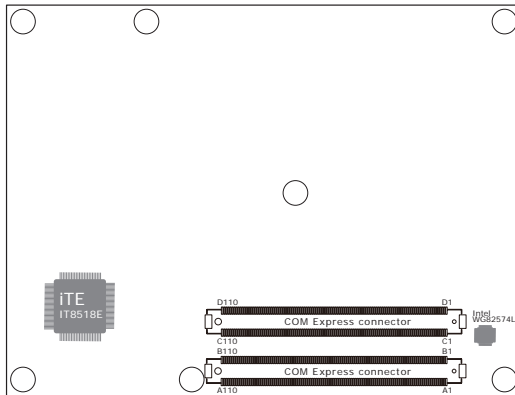

BOTTOM

Power-on Select	JP1
Power-on via power button (default)	1-2 On
Auto power-on	2-3 On

LVDS Panel Select	Channel	SW1	
800x600	6/18 bit	Single	1-4 On
1024x768	6/18 bit	Single	2-4 On, 1 Off
1024x768	8/24 bit	Single	1,3,4 On, 2 Off
1280X768	6/18 bit	Single	3-4 On, 1-2 Off
1280X800	6/18 bit	Single	1,2,4 On, 3 Off
1280X960	6/18 bit	Single	2,4 On, 1,3 Off
1280X1024	8/24 bit	Dual	1,4 On, 2,3 Off
1366X768	6/18 bit	Single	4 On, 1-3 Off
1366X768	8/24 bit	Single	1-3 On, 4 Off
1440X900	8/24 bit	Dual	2-3 On, 1,4 Off
1400X1050	8/24 bit	Dual	1,3 On, 2,4 Off
1600X900	8/24 bit	Dual	3 On, 1,2,4 Off
1680X1050	8/24 bit	Dual	1-2 On, 3-4 Off
1600X1200	8/24 bit	Dual	2 On, 1,3,4 Off
1920X1080	8/24 bit	Dual	1 On, 2-4 Off
1920X1200	8/24 bit	Dual	1-4 Off